
Prolights

StudioCobFC-30

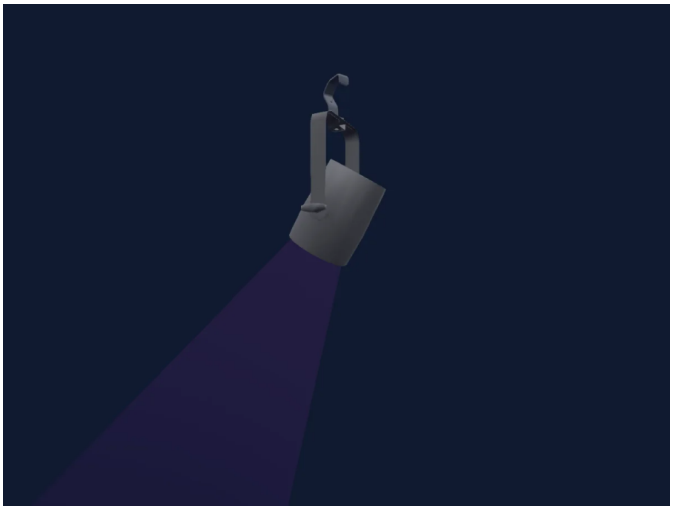

Manufacturer	**Prolights**
Type	**Moving head**
DMX modes	**3**
DMX footprint	**3, 5, 8 channels**
Beam angle	**35°**
Pan range	**360°**
Tilt range	**360°**
Size (W × H × D)	**192 × 238 × 188 mm**
GDTF fixture type	**C131D00D-C813-4A5B-81B5-A…**

Controls

RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

3ch	3 ch
5ch	5 ch
8ch	8 ch

3ch

3 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	

5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	Shutter / Strobe	0	0–10 Open 11–254 Slow Strobe 255–255 Fast Strobe

8ch

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	Shutter / Strobe	0	0–10 Open 11–254 Slow Strobe 255–255 Fast Strobe
6	Color Macro1	0	
7	Effect	0	0–10 RGB_ColorMix 11–90 Pulse Effect 100-0 91–130 Pulse Effect 100-0-100 131–170 Auto Fade R->G->B->GB->RB->RG->RGB 171–210 Auto Snap R->G->B 211–255 Auto Snap R->G->B->GB->RB->RG->RGB
8	Dimmer Mode	0	0–51 As From Menu 52–101 Dimmer Speed OFF 102–152 Dimmer Speed Fast 153–203 Dimmer Speed Medium 204–229 Dimmer Speed Slow 230–255 High Reactive