
Prolights

Sunrise2

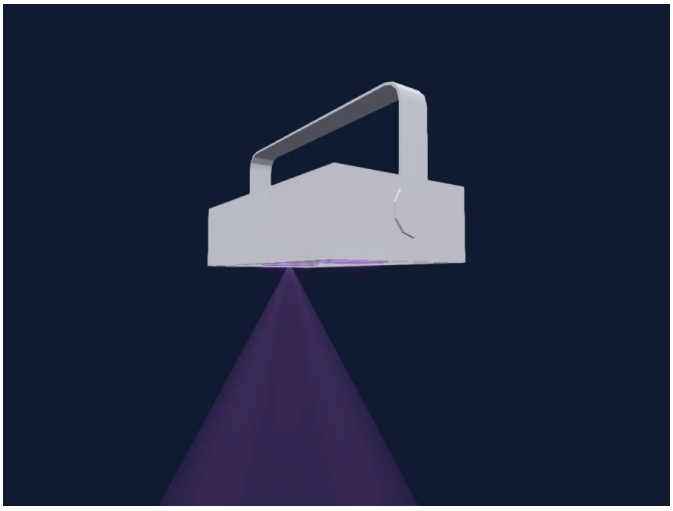

Manufacturer	**Prolights**
Type	**Blinder**
DMX modes	**4**
DMX footprint	**1, 4, 7 channels**
Beam angle	**58°**
Size (W × H × D)	**428 × 194 × 64 mm**
GDTF fixture type	**67CCEB3A-3967-4DD7-851B-F6…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

1ch	1 ch
2ch	1 ch
4ch	4 ch
7ch	7 ch

1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

4ch

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	255	0–254 Closed 255–255 Open
3	Reserved 3	0	
4	Shutter / Strobe	0	0–10 Open 11–11 Slow Strobe 12–254 Strobe 255–255 Fast Strobe

7ch

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	255	0–254 Closed 255–255 Open
3	Reserved 3	0	
4	Shutter / Strobe	0	0–10 Open 11–11 Slow Strobe 12–254 Strobe 255–255 Fast Strobe
5	Effect	0	0–10 NoFeature 11–40 Auto Program 1 41–80 Auto Program 2 81–120 Auto Program 3 121–170 Auto Program 4 171–220 Auto Program 5 221–255 Auto Program 6
6	Effect Speed	0	0–0 Slow rate 1–254 Effect Rate 255–255 Fast Rate
7	Dimmer Mode	0	0–51 As From Menu 52–101 DimmerSpeed OFF 102–152 Fast Speed 153–203 Mid Speed 204–255 Slow Speed