
Robert Juliat

Arthur LT

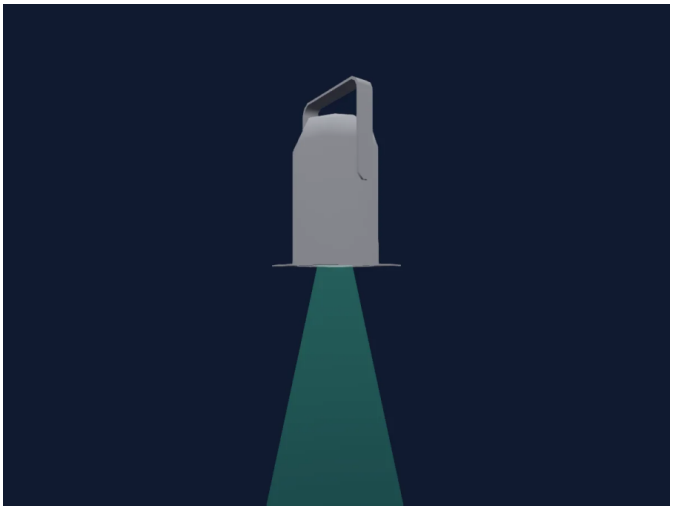

Manufacturer	**Robert Juliat**
Type	**PAR**
DMX modes	**1**
DMX footprint	**8 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**41BEE3FA-6337-4379-B512-D7…**

Controls

Dimmer

DMX modes

Mode 6: Followspot 16bit — 8 ch

Mode 6: Followspot 16bit

8 channels

Ch	Function	Default	DMX values
1	Dimmer HTP	0	0–254 HTP 0% 255–255 HTP 100%
2	Dimmer HTP Fine	0	Fine byte of Dimmer HTP
3	Dimmer	0	0–254 Closed 255–255 Open
4	Dimmer Fine	0	Fine byte of Dimmer
5	Strobe Duration	0	0–1 Strobe OFF 2–126 Strobe Fast 127–254 Strobe Med 255–255 Strobe Slow
6	Strobe Frequency	0	0–126 Frequency Slow 127–254 Frequency Med 255–255 Frequency Fast
7	Response Time	0	0–0 OFF 1–127 Fast 128–254 Med 255–255 Slow
8	Control1	0	1–10 RDM disabled 11–100 RDM enabled 101–120 Cooling mode: Silent 121–130 Cooling mode: Normal 131–255 Cooling mode: Full Power