
Sagitter

JTube X1

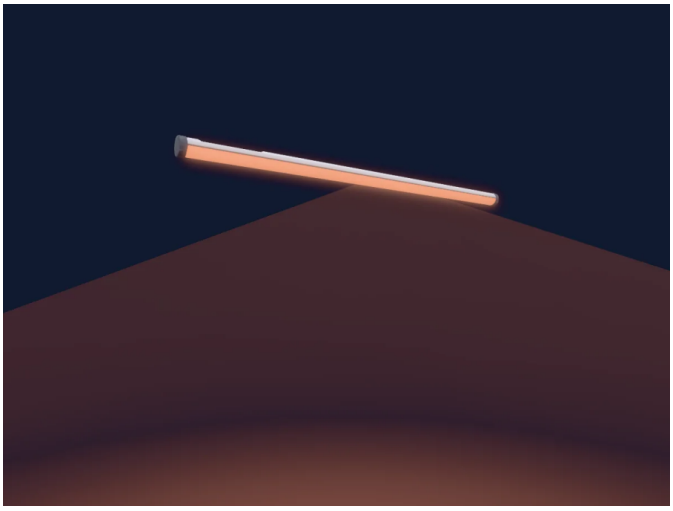

Manufacturer	**Sagitter**
Type	**PAR**
DMX modes	**1**
DMX footprint	**12 channels**
Beam angle	**135°**
Size (W × H × D)	**44 × 44 × 1060 mm**
GDTF fixture type	**3D5396EB-E3C2-41AC-B2BD-B…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Dimmer

DMX modes

12 CH MODE — 12 ch

12 CH MODE

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	0–9 No function (LED ON) 10–189 Strobe from slow to fast 190–199 No function (LED ON) 200–249 Random strobe from slow to fast 250–255 No function (LED ON)
3	Red	0	
4	Green	0	
5	Blue	0	
6	Color Add RY	0	
7	White	0	
8	Dimmer Curve	0	
9	Color Macro1Rate	0	0–7 no function 8–255 Color Macro from 001 to 101
10	C TC	0	0–7 No function 8–255 CTC from 1750K to 20000K
11	Function	0	0–20 No functions 21–255 Auto effects from 01 to 30
12	Intensity MSpeed	0	