
SHEHDS

200W LED RGB Strobe

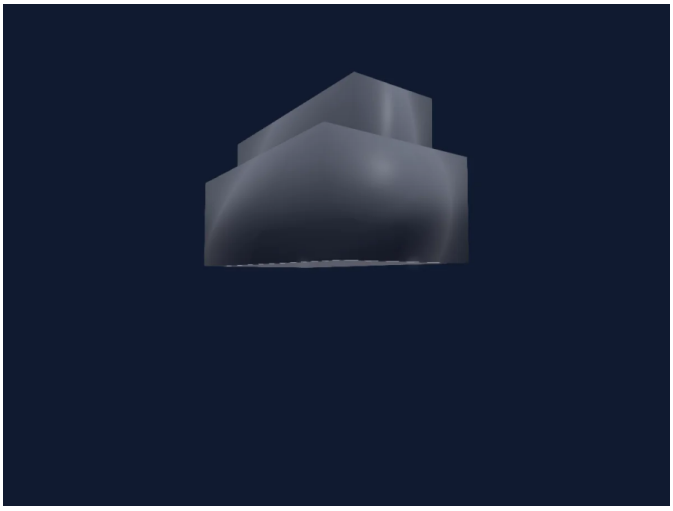

Manufacturer	**SHEHDS**
Type	**Strobe**
DMX modes	**3**
DMX footprint	**3, 7 channels**
Beam angle	**25°**
Size (W × H × D)	**390 × 250 × 150 mm**
GDTF fixture type	**4D192752-0BED-4DD8-9416-3B…**

Controls

RGB colour mixing · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

24 channel	3 ch
3 channel	3 ch
9 channel	7 ch

24 channel

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

3 channel

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

9 channel

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	

9 channel (continued)

Ch	Function	Default	DMX values
3	Effect	0	0–2 No function 3–5 Red (wheel slot 2) 6–8 Green (wheel slot 3) 9–11 Blue (wheel slot 4) 12–14 Yellow (wheel slot 5) 15–17 Magenta (wheel slot 6) 18–20 Cyan (wheel slot 7) 21–23 White (wheel slot 8) 24–26 Macro 27–29 Macro 2 30–32 Macro 3 33–35 Macro 4 36–38 Macro 5 39–41 Macro 6 42–44 Macro 7 45–47 Macro 8 48–50 Macro 9 51–53 Macro 10 54–56 Macro 11 57–59 Macro 12 60–62 Macro 13 63–65 Macro 14 66–68 Macro 15 69–71 Macro 16 72–74 Macro 17 75–77 Macro 18 78–80 Macro 19 81–83 Macro 20 84–86 Macro 21 87–89 Macro 22 90–92 Macro 23 93–95 Macro 24 96–98 Macro 25 99–101 Macro 26 102–104 Macro 27 105–107 Macro 28 108–110 Macro 29 111–113 Macro 30 114–116 Macro 31 117–119 Macro 32 120–122 Macro 33 123–125 Macro 34 126–128 Macro 35 129–131 Macro 36 132–134 Macro 37 135–137 Macro 38 138–140 Macro 39 141–143 Macro 40 144–146 Macro 41 147–149 Macro 42 150–152 Macro 43 153–155 Macro 44 156–158 Macro 45 159–161 Macro 46 162–164 Macro 47 165–167 Macro 48 168–170 Macro 49 171–173 Macro 50 174–176 Macro 51 177–179 Macro 52 180–182 Macro 53 183–185 Macro 54 186–188 Macro 55 189–191 Macro 56

9 channel (continued)

Ch	Function	Default	DMX values
4	Effect Speed	0	
5	Red	0	
6	Green	0	
7	Blue	0	