
SHEHDS

GammaPAR 18x18

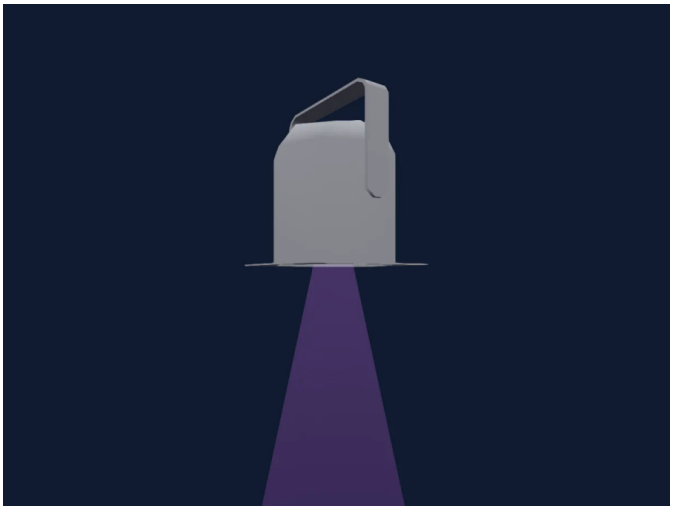

Manufacturer	**SHEHDS**
Type	**PAR**
DMX modes	**3**
DMX footprint	**6, 10 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**53373399-4A06-4948-AB82-29…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

6 Channel	6 ch
6 Channel (V-Dim)	6 ch
10 Channel	10 ch

6 Channel

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	255	
5	Color Add RY	0	
6	UV	0	

6 Channel (V-Dim)

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	255	
5	Color Add RY	0	
6	UV	0	

10 Channel

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	255	
6	Color Add RY	0	
7	UV	0	
8	Shutter / Strobe	0	0–4 open 5–254 slow strobe 255–255 fast strobe
9	Color Macro1	0	0–50 no macro 51–100 preset color 101–150 color chase 151–200 color cross fade 201–250 color pulse 251–255 sound active
10	Color Macro1Rate	0	