
ShowPro

LED Fresnel Frezno ZE-3

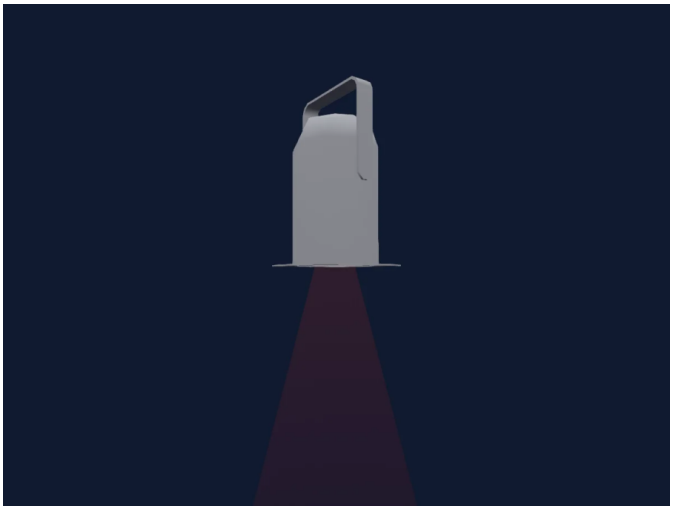

Manufacturer	**ShowPro**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 5 channels**
Beam angle	**15-45°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**28FFA209-BF81-4EE9-A827-4C3…**

Controls

Zoom · Dimmer

Safety-relevant functions

Fixture reset

DMX modes

Uno	1 ch
Dos	2 ch
STDp 5ch	5 ch

Uno

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

Dos

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

STDp 5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter1Strobe	5	0–9 No Strobe 10–98 Strobe Slow 99–99 Strobe Fast 100–109 No Strobe 110–178 Lightning Slow 179–179 Lightning Fast 180–189 No Strobe 190–254 Random Slow 255–255 Random Fast
4	Zoom	128	0–41 15deg 42–83 20deg 84–126 25deg 127–168 30deg 169–211 35deg 212–254 40deg 255–255 45deg
5	Control1	0	0–200 No function 210–220 Motor Reset 255–255 No function