
ShowPro

LED Fresnel Frezno ZM-1

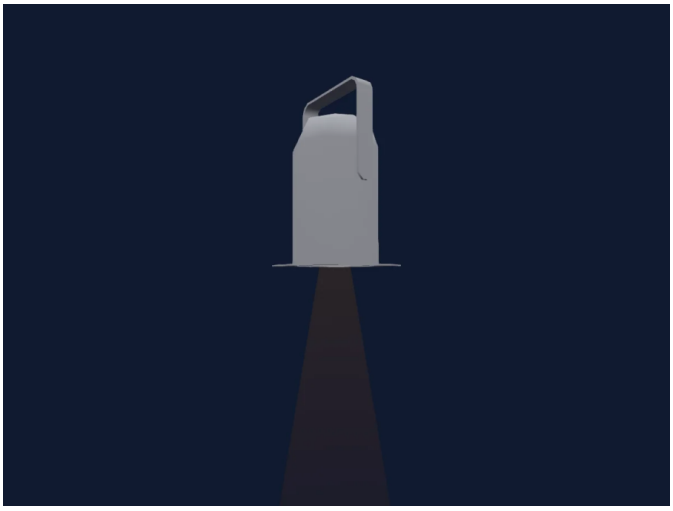

Manufacturer	**ShowPro**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 3 channels**
Beam angle	**20°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**AD734555-CBAF-4856-9FF3-DF…**

Controls

Dimmer

DMX modes

Uno	1 ch
Dos	2 ch
STDp 3ch	3 ch

Uno

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

Dos

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

STDp 3ch

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter1Strobe	5	0–9 No Strobe 10–98 Strobe Slow 99–99 Strobe Fast 100–109 No Strobe 110–178 Lightning Slow 179–179 Lightning Fast 180–189 No Strobe 190–254 Random Slow 255–255 Random Fast