
ShowPro

LED Fresnel HP HD DMX ZOOM

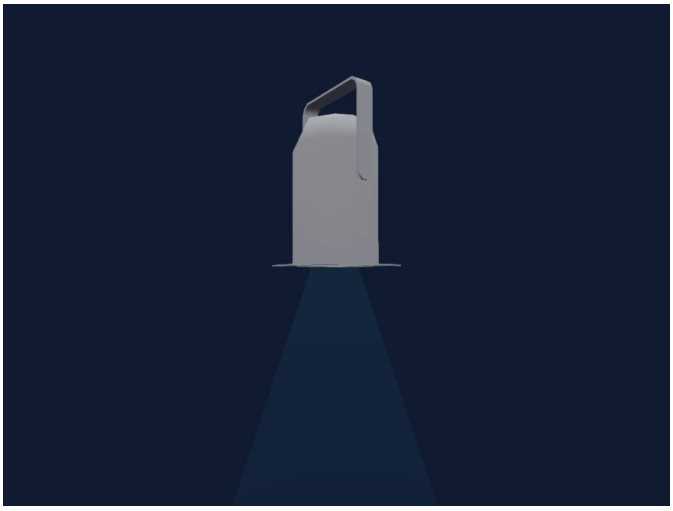

Manufacturer	**ShowPro**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 5 channels**
Beam angle	**15-60°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**C9060272-414D-49AF-B3AA-95…**

Controls

Zoom · Dimmer

DMX modes

Uno	1 ch
Dos	2 ch
STD_P	5 ch

Uno

1 channel

Ch	Function	Default	DMX values
1	Dimmer	255	0–254 Closed 255–255 Open

Dos

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Off 255–255 Full
2	Dimmer Fine	0	Fine byte of Dimmer

STD_P

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter1Strobe	0	0–9 Open 10–97 Strb Slow 98–99 Strb Fast 100–109 Open 110–177 Lightning Slow 178–179 Lightning Fast 180–189 Open 190–253 Random Slow 254–255 Random Fast
4	Zoom	127	0–126 Narrow 127–254 Medium 255–255 Wide
5	Control1	0	0–200 No Function 201–220 Motor RST 221–255 No Function 1