
ShowPro

Truss Mate 2

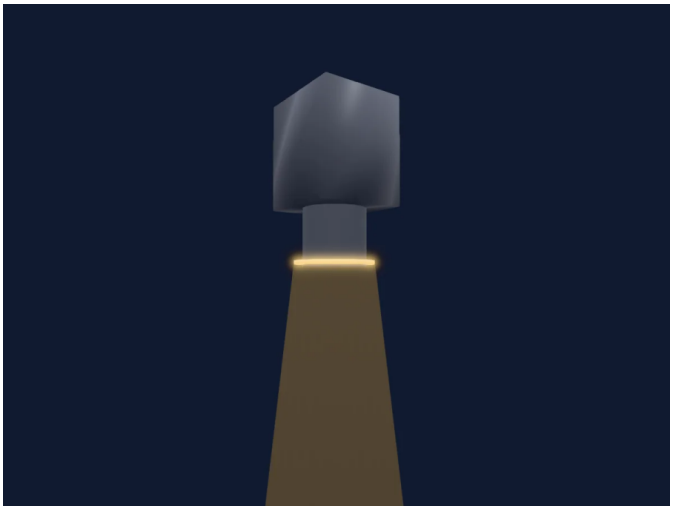

Manufacturer	**ShowPro**
Type	**PAR**
DMX modes	**2**
DMX footprint	**3, 8 channels**
Beam angle	**15°**
Size (W × H × D)	**121 × 135 × 108 mm**
GDTF fixture type	**BCA155DE-2657-4B6C-9DC8-1F…**

Controls

RGB colour mixing · Colour wheel · Dimmer

DMX modes

3 Channel Mode	3 ch
8 Channel Mode	8 ch

3 Channel Mode

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

8 Channel Mode

8 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Effects1	0	0–15 No Function 16–255 Color Macros
5	Strobe Duration	0	0–15 No Function 16–254 Strobe Slow 255–255 Strobe Fast
6	Color Macro1	0	0–31 No Function 32–63 0-100% 64–95 100-0% 96–127 100% -0-100% 128–159 Colors Fade 160–191 3Colors Snap 192–223 7Colors Snap 224–255 Sound Control
7	Dimmer	0	0–254 Closed 255–255 Open
8	Dimmer Mode	0	0–51 Preset dimmer speed from display menu 52–101 Dimmer speed mode off 102–152 Dimmer speed mode 1 (fast speed) 153–203 Dimmer speed mode 2 (middle speed) 204–255 Dimmer speed mode 3 (slow speed)