
Showtec

Helix S5000 Q4

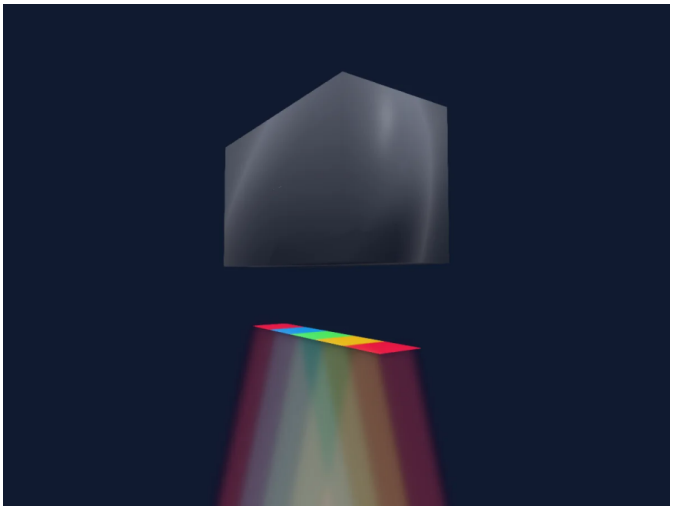

Manufacturer	**Showtec**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 6, 20 channels**
Beam angle	**25°**
Heads / cells	**5**
Size (W × H × D)	**500 × 300 × 250 mm**
GDTF fixture type	**6B53320E-72FE-4AC2-A432-CB…**

Controls

Extra LED colours · RGB colour mixing · Dimmer · Pixel control

DMX modes

6 channels 1	4 ch
6 channels	6 ch
20 channels	20 ch

6 channels 1

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

6 channels

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Strobe Frequency	0	0–10 Open 11–255 Strobe S>F

20 channels

20 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	White	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	White	0	
13	Red	0	
14	Green	0	
15	Blue	0	
16	White	0	
17	Red	0	
18	Green	0	
19	Blue	0	
20	White	0	