
Showtec

Titan Strobe BLAZE

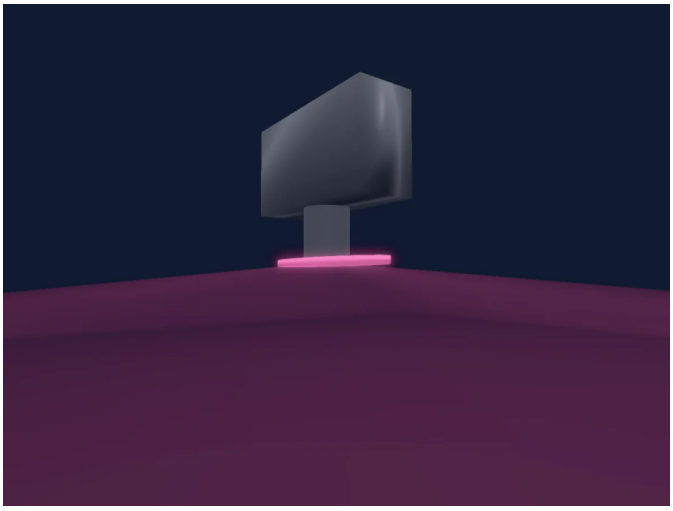

Manufacturer	**Showtec**
Type	**Blinder**
DMX modes	**3**
DMX footprint	**3, 5, 9 channels**
Beam angle	**170°**
Size (W × H × D)	**495 × 265 × 160 mm**
GDTF fixture type	**BF6C8212-66F9-461E-8D5F-AF…**

Controls

RGB colour mixing · Colour wheel · Dimmer

DMX modes

3CH	3 ch
5CH	5 ch
9CH	9 ch

3CH

3 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–4 Closed 5–255 Open
2	Strobe Mode Effect	0	0–4 No Function 5–127 Linear strobe 1>15Hz 128–255 Random Strobe
3	Color Macro1	0	0–9 No function 10–19 Red 20–29 Orange 30–39 Yellow 40–49 Green 50–59 Cyan 60–69 Blue 70–79 Pink 80–89 Magenta 90–131 Colorprog 1 slow>fast switch 132–173 Colorprog 2 slow>fast switch 174–215 Colorprog 3 slow>fast flow 216–255 Colorprog 4 slow>fast flow

5CH

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–4 Closed 5–255 Open
2	Strobe Frequency	0	0–4 No function 5–255 Strobe Frequency
3	Strobe Mode Strobe	0	0–129 Linear Strobe 130–159 Blinder 25Hz 160–189 RandomFlash 190–229 LightningFX 230–255 SyncFlash
4	Dimmer Curve	0	
5	Color Macro1	0	0–9 No Function 10–19 Red 20–29 Orange 30–39 Yellow 40–49 Green 50–59 Cyan 60–69 Blue 70–79 Pink 80–89 Magenta 90–131 Color program 1 132–173 Color program 2 174–215 Color program 3 216–255 Color program 4

9CH

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–4 Closed 5–255 Open
2	Strobe Frequency	0	0–4 No function 5–255 Strobe Frequency

9CH (continued)

Ch	Function	Default	DMX values
3	Strobe Mode Strobe	0	0–129 Linear Strobe 130–159 Blinder 25Hz 160–189 RandomFlash 190–229 LightningFX 230–255 SyncFlash
4	Dimmer Curve	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	Color Macro1	0	0–9 No Function 10–19 Red 20–29 Orange 30–39 Yellow 40–49 Green 50–59 Cyan 60–69 Blue 70–79 Pink 80–89 Magenta 90–131 Color program 1 132–173 Color program 2 174–215 Color program 3 216–255 Color program 4
9	Strobe Mode Shutter	0	0–4 No function 5–255 LEDStrobe Frequency