
Silver Star

# Fresno ZM-1 HD

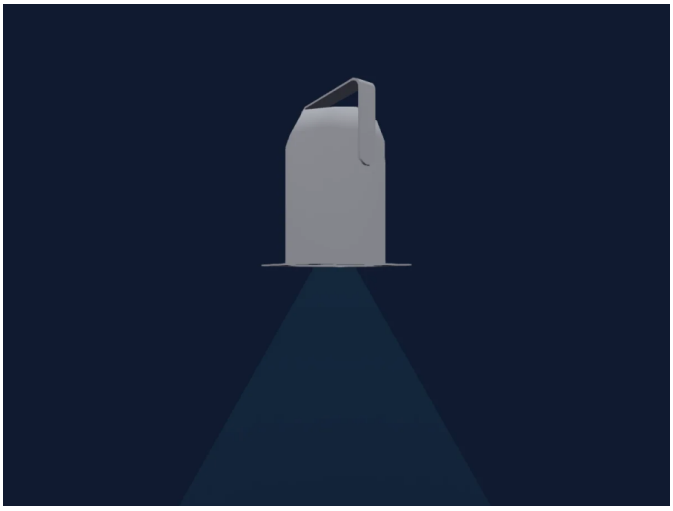

| | |
|---|---|
| Manufacturer | **Silver Star** |
| Type | **Spot** |
| DMX modes | **3** |
| DMX footprint | **1, 2, 3 channels** |
| Beam angle | **60°** |
| Size (W × H × D) | **251 × 195 × 45 mm** |
| GDTF fixture type | **5A8A8A8E-ECF6-4C5E-BF0C-77…** |

## Controls

Dimmer

## DMX modes

| | |
|---|---|
| Uno | 1 ch |
| Dos | 2 ch |
| STD Profile | 3 ch |

## Uno

1 channel

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |

## Dos

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Dimmer Fine | 0 | Fine byte of Dimmer |

## STD Profile

3 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Dimmer Fine | 0 | Fine byte of Dimmer |
| 3 | Strobe Mode | 0 | 0–9 Open<br>10–98 Strobe Slow<br>99–99 Strobe Fast<br>100–109 Open<br>110–178 Strobe Lighting Slow<br>179–179 Strobe Lighting Fast<br>180–189 Open<br>190–254 Strobe Random Slow<br>255–255 Strobe Random Fast |