
Silver Star

LED Fresnel WW HD DMX Zoom

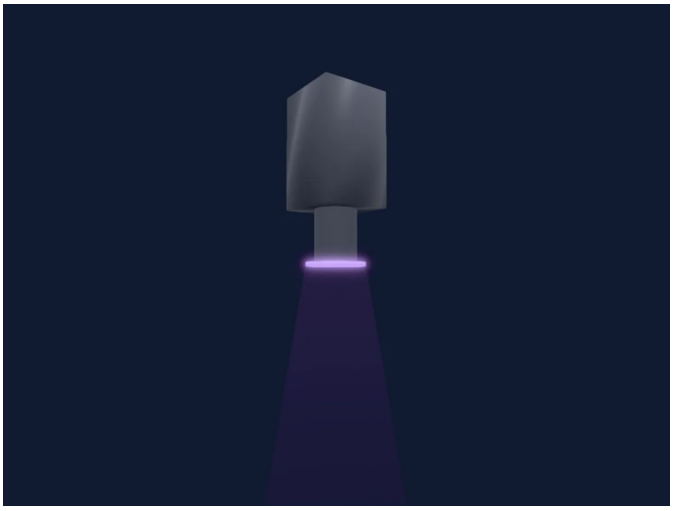

Manufacturer	**Silver Star**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 5 channels**
Beam angle	**25°**
Size (W × H × D)	**300 × 485 × 300 mm**
GDTF fixture type	**60467132-6678-4FA3-92B3-543…**

Controls

Zoom · Strobe · Dimmer

Safety-relevant functions

Fixture reset

DMX modes

Uno	1 ch
Dos	2 ch
STD.P	5 ch

Uno

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

Dos

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

STD.P

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–9 Open 10–99 Strobe 100–109 Open 110–179 Shutter1StrobePulse 4 · Lightning 1–15 Hz 180–189 Open 190–255 Random
4	Zoom	0	0–127 Narrow 128–254 Mid 255–255 Far
5	Zoom Reset	0	0–200 No Function 201–220 Motor Reset 221–255 No Function