
Snow Lighting

SnowARC Bar PIX Quad 14

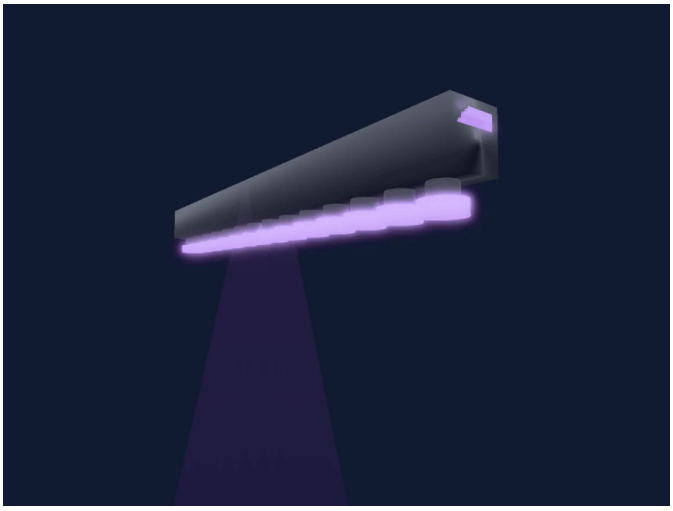

Manufacturer	**Snow Lighting**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**4, 6, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**1000 × 80 × 80 mm**
GDTF fixture type	**87A06C1F-D0BD-43A8-98C5-D…**

Controls

Extra LED colours · RGB colour mixing · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

Basic	4 ch
Pixel	4 ch
Standard	6 ch
Extended	8 ch

Basic

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	

Pixel

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	

Standard

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Effect	0	0–0 NoFunction 1–16 Prog01_Static 17–33 Prog02 34–50 Prog03 51–67 Prog04 68–84 Prog05 85–101 Prog06 102–118 Prog07 119–135 Prog08 136–152 Prog09 153–169 Prog10 170–186 Prog11 187–203 Prog12 204–220 Prog13 221–237 Prog14 238–254 Prog15 255–255 Prog16

Extended

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	

Extended (continued)

Ch	Function	Default	DMX values
6	Effect	0	0–0 NoFunction 1–16 Prog01_Static 17–33 Prog02 34–50 Prog03 51–67 Prog04 68–84 Prog05 85–101 Prog06 102–118 Prog07 119–135 Prog08 136–152 Prog09 153–169 Prog10 170–186 Prog11 187–203 Prog12 204–220 Prog13 221–237 Prog14 238–254 Prog15 255–255 Prog16
7	Effect Speed 2	0	0–14 Static_Black 15–29 Static_Red 30–44 Static_Green 45–59 Static_Blue 60–74 Static_White 75–89 Static_Amber 90–104 Static_Orange 105–119 Static_Yellow 120–134 Static_Purple 135–149 Static_Pink 150–164 Static_Cyan 165–179 Static_LightYellow 180–194 Static_LightRed 195–209 Static_LightGreen 210–224 Static_LightBlue 225–239 Static_WarmWhite 240–255 Static_Full
8	Shutter / Strobe	0	