
Snow Lighting

SnowARC Bar Pro Quad 8

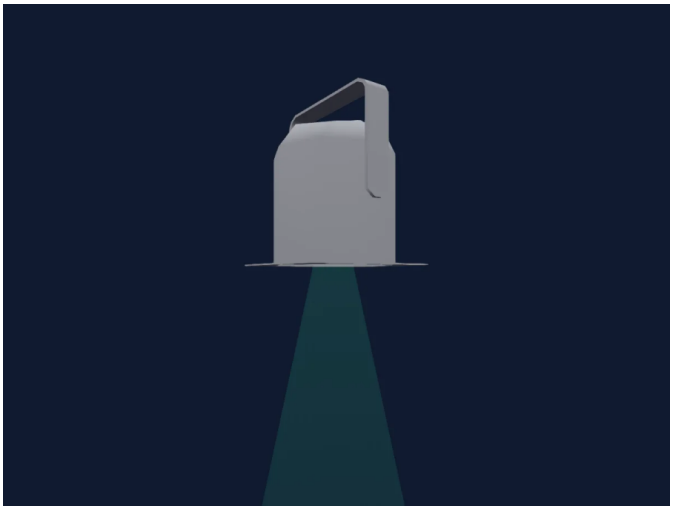

Manufacturer	**Snow Lighting**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**10 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**96D4C54C-241E-4FBB-B01C-F5…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

9 Channel	10 ch

9 Channel

10 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Effects1	0	0–15 No function 16–31 R(255)G(0)B(0)W(0) 32–47 R(0)G(255)B(0)W(0) 48–63 R(0)G(0)B(255)W(0) 64–79 R(0)G(0)B(0)W(255) 80–95 R(255)G(150)B(0)W(0) 96–111 R(255)G(180)B(0)W(0) 112–127 R(255)G(255)B(0)W(0) 128–143 R(255)G(0)B(255)W(0) 144–159 R(255)G(0)B(140)W(0) 160–175 R(0)G(255)B(255)W(0) 176–191 R(255)G(0)B(0)W(210) 192–223 R(0)G(255)B(0)W(210) 224–239 R(255)G(200)B(40)W(90) 240–255 R(255)G(255)B(255)W(255)
5	White	255	
6	Effect	0	1–19 Program 02 20–39 Program 03 40–59 Program 04 60–79 Program 05 80–99 Program 06 100–119 Program 07 120–139 Program 08 140–159 Program 09 160–179 Program 10 180–199 Program 11 200–219 Program 12 220–239 Program 13 240–255 Program 14
7	Dimmer	0	0–254 Closed 255–255 Open
8	Dimmer Fine	0	Fine byte of Dimmer
9	Global MSpeed	0	
10	Shutter1Strobe	0	0–10 Open 11–255 Strobe speed:slow to fast