
Solaris

Solaris UrbanColor 2x15 RGBW 9deg

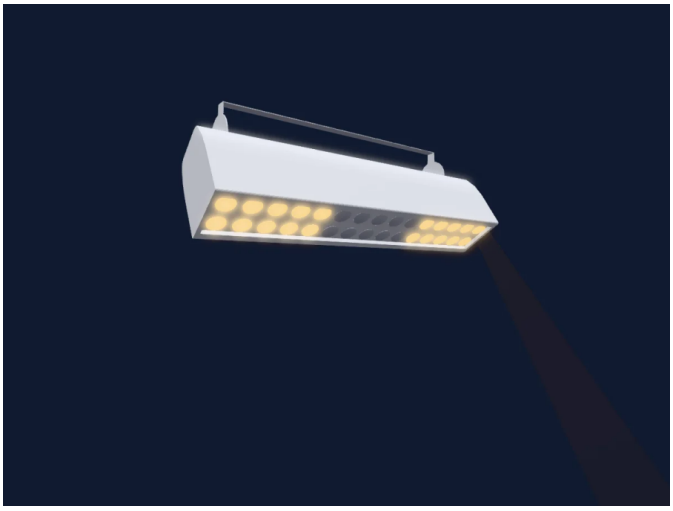

Manufacturer	**Solaris**
Type	**Moving head**
DMX modes	**8**
DMX footprint	**3, 4, 6, 8, 9, 12, 18, 24 channels**
Beam angle	**9°**
Tilt range	**180°**
Heads / cells	**3**
Size (W × H × D)	**843 × 283 × 150 mm**
GDTF fixture type	**A285EBE4-3AF1-4CF2-97F2-A9…**

Controls

Extra LED colours · RGB colour mixing · Pixel control

DMX modes

RGB 1pix8b (3ch)	3 ch
RGBW 1pix8b (4ch)	4 ch
RGB 1pix16b (6ch)	6 ch
RGBW 1pix16b (8ch)	8 ch
RGB 3pix8b (9ch)	9 ch
RGBW 3pix8b (12ch)	12 ch
RGB 3pix16b (18 ch)	18 ch
RGBW 3pix16b (24 ch)	24 ch

RGB 1pix8b (3ch)

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

RGBW 1pix8b (4ch)

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

RGB 1pix16b (6ch)

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Red Fine	0	Fine byte of Red
3	Green	0	
4	Green Fine	0	Fine byte of Green
5	Blue	0	
6	Blue Fine	0	Fine byte of Blue

RGBW 1pix16b (8ch)

8 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Red Fine	0	Fine byte of Red
3	Green	0	
4	Green Fine	0	Fine byte of Green
5	Blue	0	
6	Blue Fine	0	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White

RGB 3pix8b (9ch)

9 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Red	0	
5	Green	0	
6	Blue	0	
7	Red	0	
8	Green	0	
9	Blue	0	

RGBW 3pix8b (12ch)

12 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	White	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	White	0	

RGB 3pix16b (18 ch)

18 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Red Fine	0	Fine byte of Red
3	Green	0	
4	Green Fine	0	Fine byte of Green
5	Blue	0	
6	Blue Fine	0	Fine byte of Blue
7	Red	0	
8	Red Fine	0	Fine byte of Red
9	Green	0	
10	Green Fine	0	Fine byte of Green
11	Blue	0	
12	Blue Fine	0	Fine byte of Blue
13	Red	0	
14	Red Fine	0	Fine byte of Red
15	Green	0	
16	Green Fine	0	Fine byte of Green
17	Blue	0	
18	Blue Fine	0	Fine byte of Blue

RGBW 3pix16b (24 ch)

24 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Red Fine	0	Fine byte of Red
3	Green	0	
4	Green Fine	0	Fine byte of Green
5	Blue	0	
6	Blue Fine	0	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White

RGBW 3pix16b (24 ch) (continued)

Ch	Function	Default	DMX values
9	Red	0	
10	Red Fine	0	Fine byte of Red
11	Green	0	
12	Green Fine	0	Fine byte of Green
13	Blue	0	
14	Blue Fine	0	Fine byte of Blue
15	White	0	
16	White Fine	0	Fine byte of White
17	Red	0	
18	Red Fine	0	Fine byte of Red
19	Green	0	
20	Green Fine	0	Fine byte of Green
21	Blue	0	
22	Blue Fine	0	Fine byte of Blue
23	White	0	
24	White Fine	0	Fine byte of White