
StairVille

CB-100 LED Color Beam

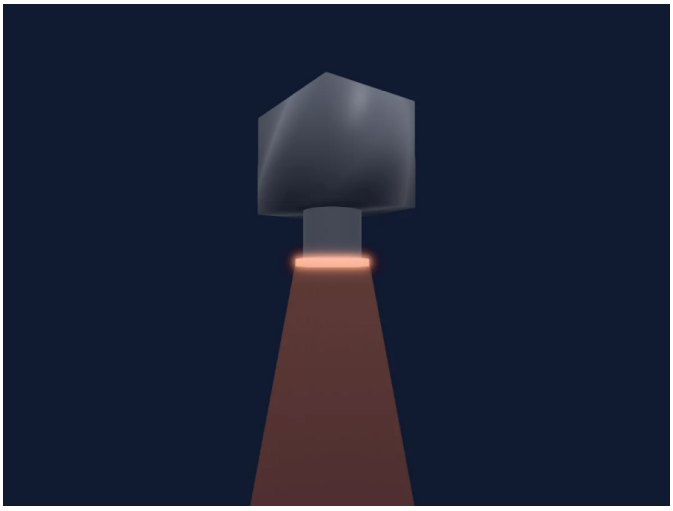

Manufacturer	**StairVille**
Type	**PAR**
DMX modes	**1**
DMX footprint	**4 channels**
Beam angle	**25°**
Size (W × H × D)	**350 × 280 × 280 mm**
GDTF fixture type	**A7EA435C-F63A-4712-8E17-EB…**

Controls

Colour wheel · Dimmer

DMX modes

Default	4 ch

Default

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Color Wheel	0	0–7 White (wheel slot 1) 8–15 Dark Blue (wheel slot 2) 16–23 Yellow (wheel slot 3) 24–31 Pink (wheel slot 4) 32–39 Green (wheel slot 5) 40–47 Red (wheel slot 6) 48–55 Light Blue (wheel slot 7) 56–63 Orange Red (wheel slot 8) 64–71 White D-Blue (wheel slot 9) 72–79 DBlue Yellow (wheel slot 10) 80–87 Yell Pink (wheel slot 11) 88–95 Pnk Green (wheel slot 12) 96–103 Green Red (wheel slot 13) 104–111 Red LBlue (wheel slot 14) 112–119 LBlue OrRed (wheel slot 15) 120–127 OrEd White (wheel slot 16) 128–191 Col Scrl CW (wheel slot 17) 192–255 Col Scrl CCW (wheel slot 18)
3	Strobe Mode Strobe	0	
4	Function	0	