
StairVille

FS-x75 LED Follow Spot DMX

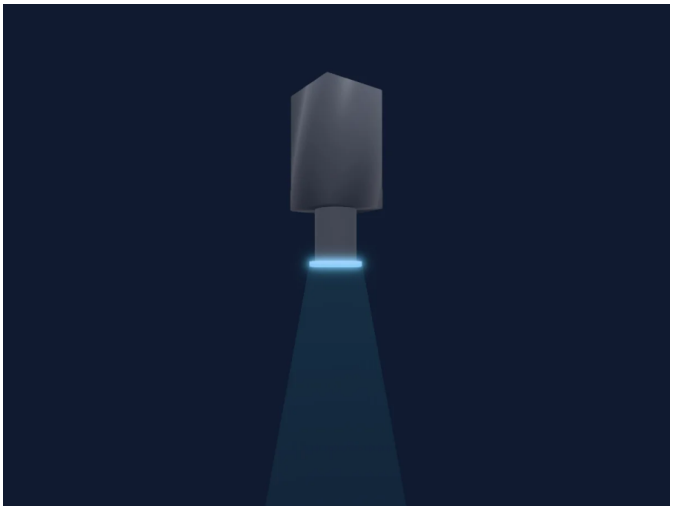

Manufacturer	**StairVille**
Type	**Spot**
DMX modes	**1**
DMX footprint	**3 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 450 × 250 mm**
GDTF fixture type	**DC37C739-4435-45C3-9D1F-63…**

Controls

Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

Default	3 ch

Default

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Color Wheel	0	0–31 weiss (wheel slot 1) 32–63 dunkelblau (wheel slot 2) 64–95 gelb (wheel slot 3) 96–127 magenta (wheel slot 4) 128–159 gruen (wheel slot 5) 160–191 rot (wheel slot 6) 192–223 cyan (wheel slot 7) 224–255 orange (wheel slot 8)
3	Shutter / Strobe	255	0–3 Close 4–7 Open 8–215 strobe asc 216–255 open