
StairVille

LED Bar 252

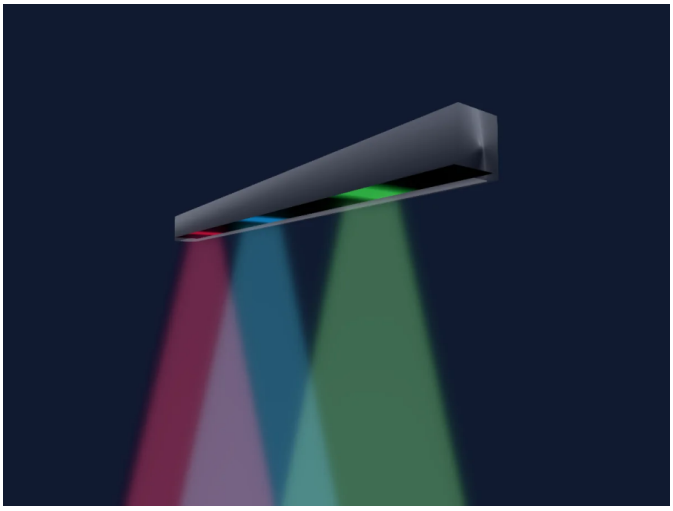

Manufacturer	**StairVille**
Type	**LED bar**
DMX modes	**1**
DMX footprint	**11 channels**
Beam angle	**25°**
Heads / cells	**3**
Size (W × H × D)	**1010 × 70 × 65 mm**
GDTF fixture type	**C01E1AAD-89A4-4B6B-8F02-63…**

Controls

Colour wheel · Strobe · Pixel control

Safety-relevant functions

Strobe

DMX modes

11 CH 11 ch

11 CH

11 channels

Ch	Function	Default	DMX values
1	Color1Mode	60	0–40 Zero 41–80 3 Seg Mode 81–120 1 Seg Mode 121–160 Color Shutter 161–199 Color Change 200–240 Color Flow 241–255 Dream Flow
2	Shutter / Strobe	0	0–40 open 41–255 Strobe from slow to fast
3	Red	0	0–254 Zero 255–255 Full
4	Green	0	0–254 Zero 255–255 Full
5	Blue	0	0–254 Zero 255–255 Full
6	Red	0	0–254 Zero 255–255 Full
7	Green	0	0–254 Zero 255–255 Full
8	Blue	0	0–254 Zero 255–255 Full
9	Red	0	0–254 Zero 255–255 Full
10	Green	0	0–254 Zero 255–255 Full
11	Blue	0	0–254 Zero 255–255 Full