
StairVille

PS-1500-DMX

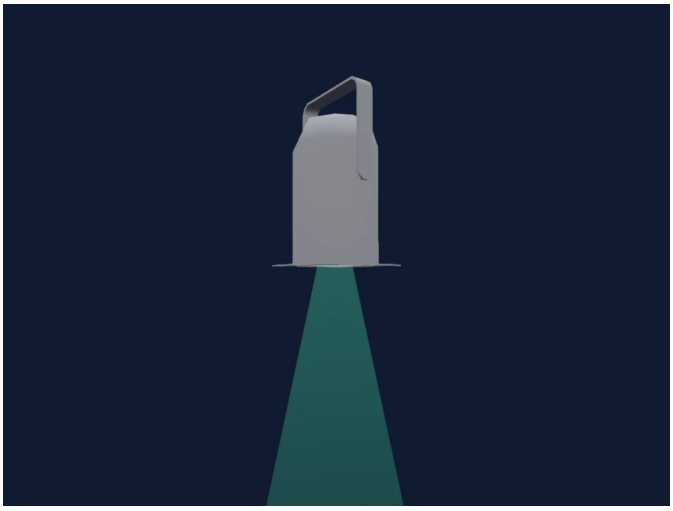

Manufacturer	**StairVille**
Type	**PAR**
DMX modes	**1**
DMX footprint	**2 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**F58A136F-F878-434C-BA76-76…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

Standard mode 2 ch

Standard mode

2 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–15 Closed 16–254 min Strobe 255–255 max Strobe
2	Dimmer	0	0–15 Closed 16–255 Open