
Starway

StormLite HD

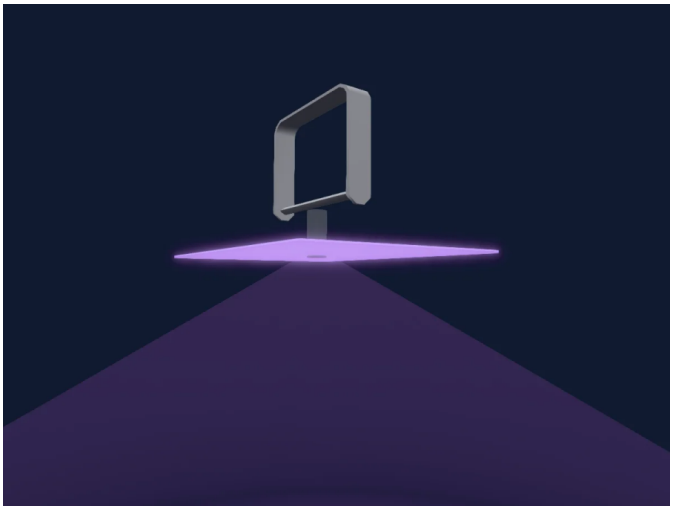

Manufacturer	**Starway**
Type	**PAR**
DMX modes	**2**
DMX footprint	**8, 14 channels**
Beam angle	**120°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**E38B3B22-1144-45F0-A20E-96E…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

Safety-relevant functions

Strobe

DMX modes

Mode Changeur de Couleur 8 canaux 16 Bits	8 ch
Hybrid 14 Ch 16Bits	14 ch

Mode Changeur de Couleur 8 canaux 16 Bits

8 channels

Ch	Function	Default	DMX values
1	Color RGBRed	255	
2	Color RGBRed Fine	255	Fine byte of Color RGBRed
3	Color RGBGreen	255	
4	Color RGBGreen Fine	255	Fine byte of Color RGBGreen
5	Color RGBBlue	255	
6	Color RGBBlue Fine	255	Fine byte of Color RGBBlue
7	White	0	
8	White Fine	0	Fine byte of White

Hybrid 14 Ch 16Bits

14 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Red	255	
4	Red Fine	255	Fine byte of Red
5	Green	255	
6	Green Fine	255	Fine byte of Green
7	Blue	177	
8	Blue Fine	223	Fine byte of Blue
9	White	255	
10	White Fine	255	Fine byte of White
11	Color Wheel	0	
12	Shutter / Strobe	0	
13	Strobe Mode Shutter	0	0–5 HIGH EFFOCENCY COLOR 6–10 COLOR BURST 11–255 STROB FREQUENCY
14	Shutter1Strobe Effect	0	0–5 No Function 6–42 Ramp UP 43–85 Ramp Down 86–128 Ramp Up/Down 129–171 Random 172–214 Lightning 215–255 Spikie