
Terbly

# F90-CW

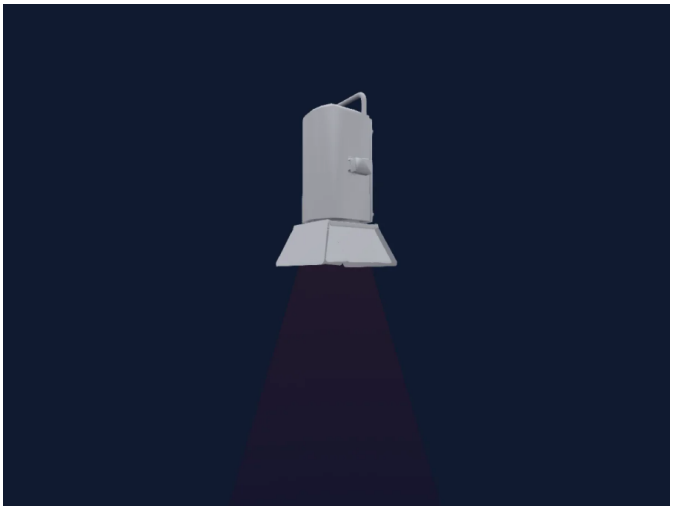

| | |
|---|---|
| Manufacturer | **Terbly** |
| Type | **Spot** |
| DMX modes | **3** |
| DMX footprint | **2, 3, 6 channels** |
| Beam angle | **15-57°** |
| Size (W × H × D) | **349 × 666 × 349 mm** |
| GDTF fixture type | **2DEED1F6-7922-4F17-8861-4C…** |

## Controls

Zoom · Extra LED colours · Dimmer

## DMX modes

| | |
|---|---|
| 2Channel | 2 ch |
| 3Channel | 3 ch |
| 6Channel | 6 ch |

## 2Channel

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Zoom | 128 | 0–127 narrow<br>128–254 normal<br>255–255 wide |

## 3Channel

3 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Color Add CW | 255 | |
| 2 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 3 | Zoom | 128 | 0–127 narrow<br>128–254 normal<br>255–255 wide |

## 6Channel

6 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Color Add CW | 255 | |
| 2 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 3 | Dimmer Fine | 0 | Fine byte of Dimmer |
| 4 | Zoom | 128 | 0–127 narrow<br>128–254 normal<br>255–255 wide |
| 5 | Zoom Fine | 0 | Fine byte of Zoom |
| 6 | Dimmer Curve | 0 | 0–20 Standard<br>21–40 Stage<br>41–60 TV<br>61–80 Architectural<br>81–100 Theatre<br>101–255 Default to Unit Curve Setting |