
UKing

# UKING ZQ06017 - 24PCS LED WALL WASH LIGHT

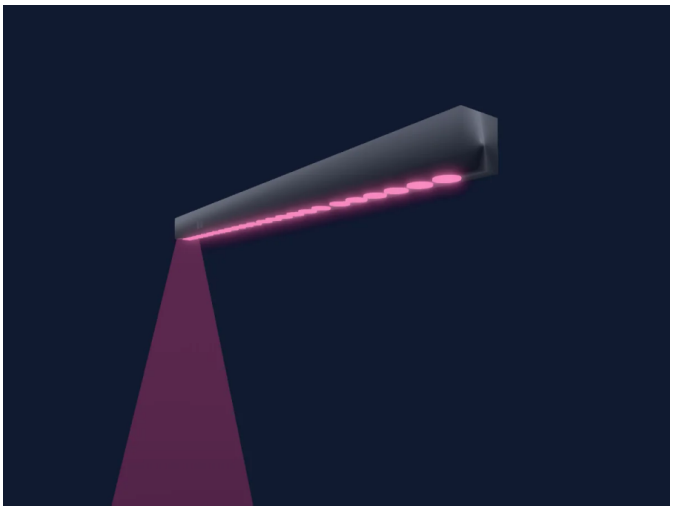

| | |
|---|---|
| Manufacturer | **UKing** |
| Type | **PAR** |
| DMX modes | **7** |
| DMX footprint | **2, 3, 4, 6, 7, 12, 24 channels** |
| Beam angle | **24-26°** |
| Heads / cells | **8** |
| Size (W × H × D) | **1010 × 60 × 60 mm** |
| GDTF fixture type | **8FFD5C02-7506-489D-897D-E0…** |

## Controls

RGB colour mixing · Colour wheel · Dimmer · Pixel control

## DMX modes

| | |
|---|---|
| 2Channel | 2 ch |
| 3Channel | 3 ch |
| 4Channel | 4 ch |
| 6Channel | 6 ch |
| 7Channel | 7 ch |
| 12Channel | 12 ch |
| 24Channel | 24 ch |

## 2Channel

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Color Wheel | 0 | 0–5 None<br>6–16 LED color selection:red<br>17–27 LED color selection:green<br>28–38 LED color selection:blue<br>39–49 LED color selection:yellow<br>50–60 LED color selection:purple<br>61–71 LED color selection:cyan<br>72–82 LED color selection:white<br>83–93 Point to point control-1<br>94–104 Point to point control-2<br>105–115 Point to point control-3<br>116–126 Point to point control-4<br>127–137 Point to point control-5<br>138–148 Point to point control-6<br>149–159 Point to point control-7<br>160–170 Point to point control-8<br>171–181 Point to point control-9<br>182–192 Red gradient effect<br>193–203 Green gradient effect<br>204–214 Blue gradient effect<br>215–225 Purple gradient effect<br>226–236 Yellow<br>237–247 Cyan gradient effect<br>248–255 Sound |
| 2 | Intensity MSpeed | 0 | |

## 3Channel

3 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 0 | |
| 2 | Green | 0 | |
| 3 | Blue | 0 | |

## 4Channel

4 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |
| 2 | Red | 0 | |
| 3 | Green | 0 | |
| 4 | Blue | 0 | |

## 6Channel

6 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 0 | |
| 2 | Green | 0 | |
| 3 | Blue | 0 | |
| 4 | Red | 0 | |
| 5 | Green | 0 | |
| 6 | Blue | 0 | |

## 7Channel

7 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |
| 2 | Red | 0 | |
| 3 | Green | 0 | |
| 4 | Blue | 0 | |
| 5 | Strobe Frequency | 0 | 0–6 None<br>7–255 RGB Strobe |
| 6 | Color Wheel | 0 | 0–5 None<br>6–16 LED color selection:red<br>17–27 LED color selection:green<br>28–38 LED color selection:blue<br>39–49 LED color selection:yellow<br>50–60 LED color selection:purple<br>61–71 LED color selection:cyan<br>72–82 LED color selection:white<br>83–93 Point to point control-1<br>94–104 Point to point control-2<br>105–115 Point to point control-3<br>116–126 Point to point control-4<br>127–137 Point to point control-5<br>138–148 Point to point control-6<br>149–159 Point to point control-7<br>160–170 Point to point control-8<br>171–181 Point to point control-9<br>182–192 Red gradient effect<br>193–203 Green gradient effect<br>204–214 Blue gradient effect<br>215–225 Purple gradient effect<br>226–236 Yellow<br>237–247 Cyan gradient effect<br>248–255 Sound |
| 7 | Intensity MSpeed | 0 | |

## 12Channel

12 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 0 | |
| 2 | Green | 0 | |
| 3 | Blue | 0 | |
| 4 | Red | 0 | |
| 5 | Green | 0 | |
| 6 | Blue | 0 | |
| 7 | Red | 0 | |
| 8 | Green | 0 | |
| 9 | Blue | 0 | |
| 10 | Red | 0 | |
| 11 | Green | 0 | |
| 12 | Blue | 0 | |

## 24Channel

24 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 0 | |

## 24Channel (continued)

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 2 | Green | 0 | |
| 3 | Blue | 0 | |
| 4 | Red | 0 | |
| 5 | Green | 0 | |
| 6 | Blue | 0 | |
| 7 | Red | 0 | |
| 8 | Green | 0 | |
| 9 | Blue | 0 | |
| 10 | Red | 0 | |
| 11 | Green | 0 | |
| 12 | Blue | 0 | |
| 13 | Red | 0 | |
| 14 | Green | 0 | |
| 15 | Blue | 0 | |
| 16 | Red | 0 | |
| 17 | Green | 0 | |
| 18 | Blue | 0 | |
| 19 | Red | 0 | |
| 20 | Green | 0 | |
| 21 | Blue | 0 | |
| 22 | Red | 0 | |
| 23 | Green | 0 | |
| 24 | Blue | 0 | |