
Varytec

Giga Bar 5

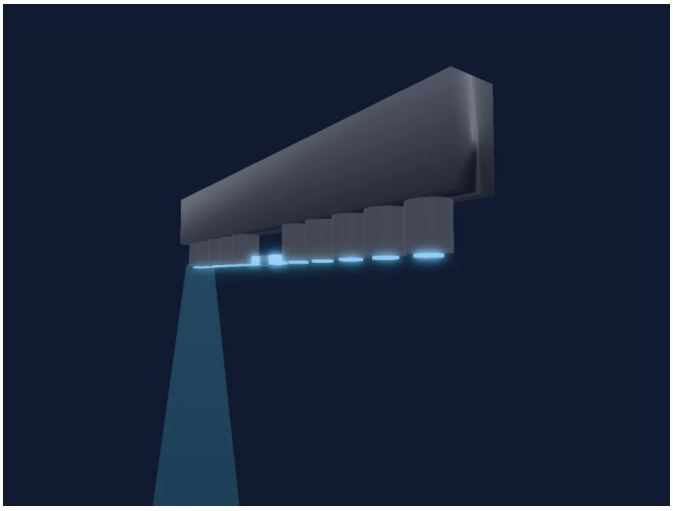

Manufacturer	**Varytec**
Type	**PAR**
DMX modes	**7**
DMX footprint	**3, 4, 5, 8, 10, 48, 51 channels**
Beam angle	**15°**
Heads / cells	**12**
Size (W × H × D)	**1070 × 141 × 80 mm**
GDTF fixture type	**E8A5FC45-2294-44C6-96F7-10E…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Dimmer · Pixel control

Safety-relevant functions

Fixture reset

DMX modes

3 Channel Mode	3 ch
4 Channel Mode	4 ch
5 Channel Mode	5 ch
8 Channel Mode	8 ch
10 Channel Mode	10 ch
48 Channel Mode	48 ch
51 Channel Mode	51 ch

3 Channel Mode

3 channels

Ch	Function	Default	DMX values
1	Color Effects1	0	
2	Color Macro1	0	
3	Dimmer	0	

4 Channel Mode

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

5 Channel Mode

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	

8 Channel Mode

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Strobe Frequency	0	
7	Color Macro1	0	
8	Color Effects1	0	

10 Channel Mode

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Strobe Frequency	0	
7	Dimmer Mode	0	
8	Color Macro1	0	

10 Channel Mode (continued)

Ch	Function	Default	DMX values
9	Effect Speed	0	
10	Fixture Global Reset	0	

48 Channel Mode

48 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	White	0	
9	Red	255	
10	Green	255	
11	Blue	255	
12	White	0	
13	Red	255	
14	Green	255	
15	Blue	255	
16	White	0	
17	Red	255	
18	Green	255	
19	Blue	255	
20	White	0	
21	Red	255	
22	Green	255	
23	Blue	255	
24	White	0	
25	Red	255	
26	Green	255	
27	Blue	255	
28	White	0	
29	Red	255	
30	Green	255	
31	Blue	255	
32	White	0	
33	Red	255	
34	Green	255	
35	Blue	255	
36	White	0	
37	Red	255	
38	Green	255	
39	Blue	255	

48 Channel Mode (continued)

Ch	Function	Default	DMX values
40	White	0	
41	Red	255	
42	Green	255	
43	Blue	0	
44	White	0	
45	Red	0	
46	Green	0	
47	Blue	0	
48	White	0	

51 Channel Mode

51 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Red	255	
7	Green	255	
8	Blue	255	
9	White	0	
10	Red	255	
11	Green	255	
12	Blue	255	
13	White	0	
14	Red	255	
15	Green	255	
16	Blue	255	
17	White	0	
18	Red	255	
19	Green	255	
20	Blue	255	
21	White	0	
22	Red	255	
23	Green	255	
24	Blue	255	
25	White	0	
26	Red	255	
27	Green	255	
28	Blue	255	
29	White	0	
30	Red	255	
31	Green	255	
32	Blue	255	

51 Channel Mode (continued)

Ch	Function	Default	DMX values
33	White	0	
34	Red	255	
35	Green	255	
36	Blue	255	
37	White	0	
38	Red	255	
39	Green	255	
40	Blue	255	
41	White	0	
42	Red	255	
43	Green	255	
44	Blue	255	
45	White	0	
46	Red	255	
47	Green	255	
48	Blue	255	
49	White	0	
50	Color Macro1	0	
51	Effect Speed	0	