
Varytec

Retro Blinder OCTO 380

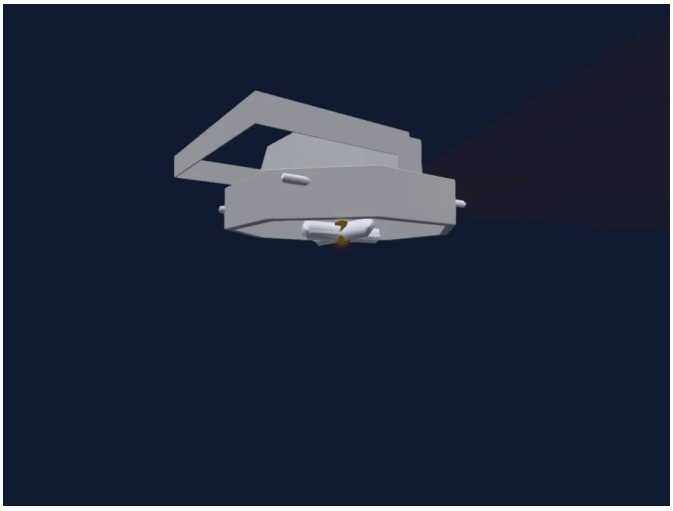

Manufacturer	**Varytec**
Type	**Blinder**
DMX modes	**1**
DMX footprint	**31 channels**
Beam angle	**25°**
Heads / cells	**8**
Size (W × H × D)	**357 × 41 × 264 mm**
GDTF fixture type	**8899ED31-6299-4AF2-88D8-CD…**

Controls

Dimmer · Pixel control

DMX modes

31-channel mode — 31 ch

31-channel mode

31 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	
5	Shutter1Strobe Effect	0	0–3 Shutter1StrobeEffect 1 4–103 StrobeRate 2 104–107 StrobeModePulseOpen 3 108–207 StrobeModePulse 4 208–212 StrobeModePulseOpen 5 213–251 StrobeModeRandom 6 252–255 StrobeModePulseOpen 7
6	Color RGBRed	0	
7	Color RGBGreen	0	
8	Color RGBBlue	0	
9	Color RGBRed	0	
10	Color RGBGreen	0	
11	Color RGBBlue	0	
12	Color RGBRed	0	
13	Color RGBGreen	0	
14	Color RGBBlue	0	
15	Color RGBRed	0	
16	Color RGBGreen	0	
17	Color RGBBlue	0	
18	Color RGBRed	0	
19	Color RGBGreen	0	
20	Color RGBBlue	0	
21	Color RGBRed	0	
22	Color RGBGreen	0	
23	Color RGBBlue	0	
24	Color RGBRed	0	
25	Color RGBGreen	0	
26	Color RGBBlue	0	
27	Color RGBRed	0	
28	Color RGBGreen	0	
29	Color RGBBlue	0	
30	Strobe Mode Shutter	0	0–99 StrobeModeShutter 1 100–255 StrobeFrequency 2
31	Strobe Frequency	0	