
Varytec

Retro Blinder TRI 380

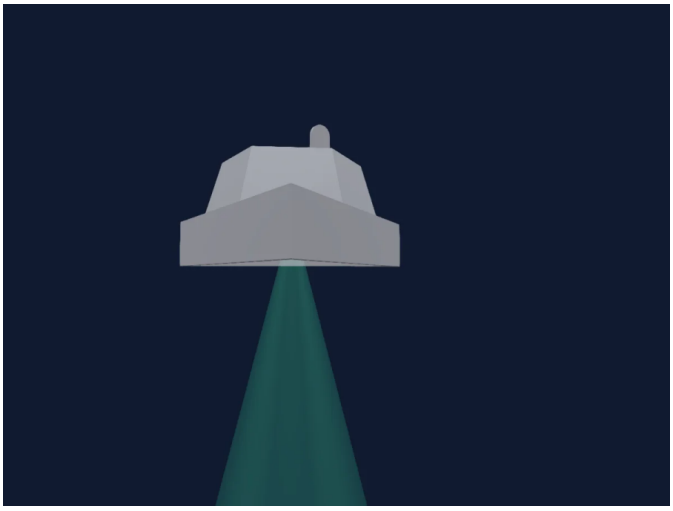

Manufacturer	**Varytec**
Type	**Blinder**
DMX modes	**2**
DMX footprint	**5, 25 channels**
Beam angle	**30°**
Heads / cells	**6**
Size (W × H × D)	**397 × 196 × 344 mm**
GDTF fixture type	**B8F17380-D835-465D-8A46-77…**

Controls

RGB colour mixing · Strobe · Dimmer · Pixel control

Safety-relevant functions

Strobe

DMX modes

Minimal	5 ch
Ludicrous	25 ch

Minimal

5 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Dimmer	0	0–254 Closed 255–255 Open
5	Shutter / Strobe	0	0–3 Open 4–102 Strobe min 103–103 Strobe max 104–107 Open 108–206 Opening pulse slow 207–207 Opening pulse fast 208–212 Open 213–250 Random strobe min 251–251 Random strobe max 252–255 Open

Ludicrous

25 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer	0	0–254 Closed 255–255 Open
4	Dimmer	0	0–254 Closed 255–255 Open
5	Shutter / Strobe	0	0–3 Open 4–102 Strobe min 103–103 Strobe max 104–107 Open 108–206 Opening pulse slow 207–207 Opening pulse fast 208–212 Open 213–250 Random strobe min 251–251 Random strobe max 252–255 Open
6	Red	0	
7	Green	0	
8	Blue	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Red	0	
13	Green	0	
14	Blue	0	
15	Red	0	
16	Green	0	
17	Blue	0	
18	Red	0	
19	Green	0	
20	Blue	0	

Ludicrous (continued)

Ch	Function	Default	DMX values
21	Red	0	
22	Green	0	
23	Blue	0	
24	Automatic Mode	100	0–99 Open 100–255 Automatic Mode
25	Automatic Mode Speed	0	0–254 Slow 255–255 Fast