
Vello Light

TH-150 Fresnel

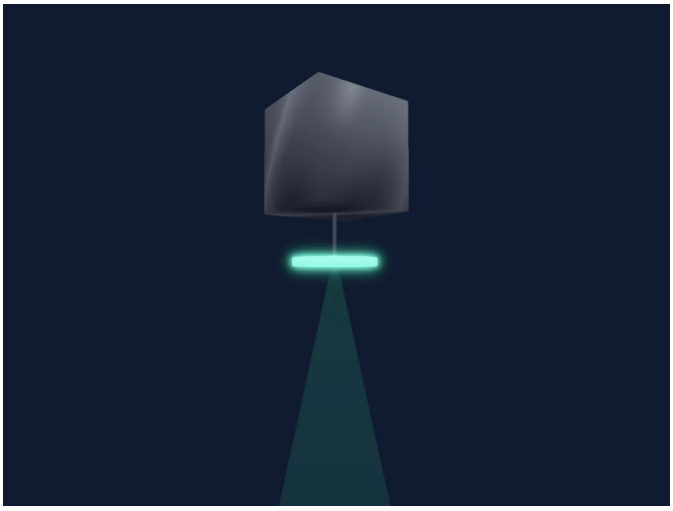

Manufacturer	**Vello Light**
Type	**Spot**
DMX modes	**1**
DMX footprint	**2 channels**
Beam angle	**25°**
Size (W × H × D)	**240 × 258 × 250 mm**
GDTF fixture type	**03D2A7EA-B09F-4D07-8E71-81…**

Controls

Strobe · Dimmer

DMX modes

Default 2 ch

Default

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	111	0–10 Closed 11–104 Strobe Fast-Slow · Fast 15–1.85 Hz 105–110 Strobe Fast-Slow · Slow 1.71–1 Hz 111–115 Open 116–159 Pulse Strobe Open Slow-Fast · Slow 0.5–13.2 Hz 160–165 Pulse Strobe Open Slow-Fast · Fast 13.5–15 Hz 166–170 Open 171–214 Pulse Strobe Closed Slow-Fast · Slow 0.5–13.2 Hz 215–220 Pulse Strobe Closed Slow-Fast · Fast 13.5–15 Hz 221–230 Open 231–239 Random Strobe Slow-Fast · Slow 0.5–8.79 Hz 240–245 Random Strobe Slow-Fast · Fast 9.82–15 Hz 246–255 Open