
Wisdom

Basic LED PAR 8CH

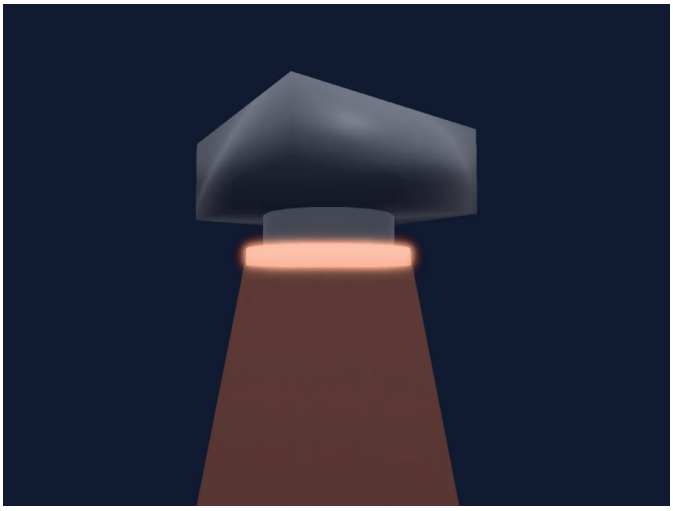

Manufacturer	**Wisdom**
Type	**PAR**
DMX modes	**1**
DMX footprint	**8 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 100 × 250 mm**
GDTF fixture type	**A35BB232-534C-4E8F-9080-7A…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

Safety-relevant functions

Strobe

DMX modes

Default	8 ch

Default

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Shutter / Strobe	0	
7	Color Control	0	0–50 CH1-CH6 CONTOL 51–100 Different color output 101–150 Color jump change 151–200 Color Gradate 201–250 Color pulse change 251–255 Sound Active
8	Intensity MSpeed	0	