
Wisdom

Smartbat

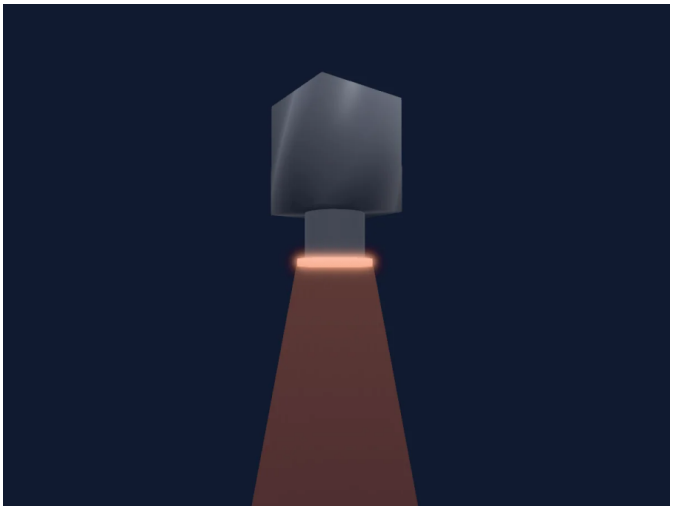

Manufacturer	**Wisdom**
Type	**PAR**
DMX modes	**1**
DMX footprint	**10 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 300 × 250 mm**
GDTF fixture type	**DA233C2A-69CE-45A9-B7A1-5…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

Default	10 ch

Default

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Color Add Y	0	
7	UV	0	
8	Strobe Mode Strobe	0	0–0 Closed 1–255 slow to fast
9	Color Macro1	0	0–8 No Function 9–50 Static Color 51–100 Jump Mode 101–150 Puls Jump Mode 151–200 Fade Mode 201–220 Sound mode 1 221–240 Sound mode 2 241–255 Sound mode 3
10	Color Macro1Rate	0	