
Wisdom

SOPHIE LED GIAN-CARLO V1

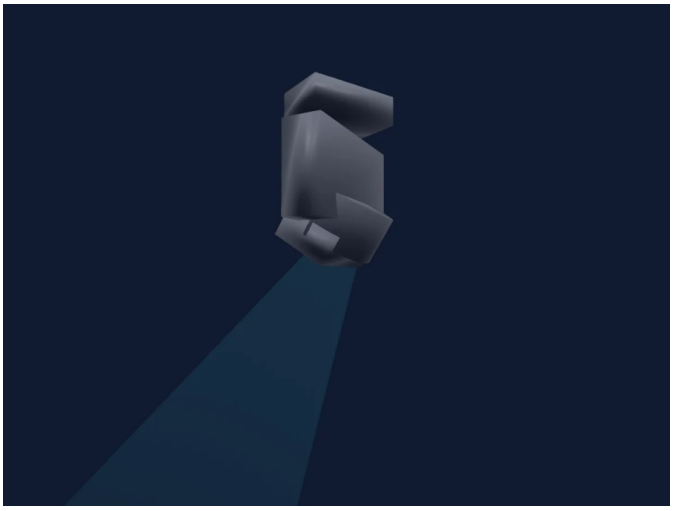

Manufacturer	**Wisdom**
Type	**Moving head**
DMX modes	**1**
DMX footprint	**30 channels**
Beam angle	**4-60°**
Pan range	**540°**
Tilt range	**220°**
Heads / cells	**3**
Size (W × H × D)	**219 × 110 × 220 mm**
GDTF fixture type	**DB1C2D51-8BB3-4D5F-9697-B…**

Controls

Zoom · Extra LED colours · Colour wheel · Effect speed · Strobe · Dimmer · Pixel control · Movement speed

Safety-relevant functions

Fixture reset · Built-in effect programmes

DMX modes

30ch 30 ch

30ch

30 channels

Ch	Function	Default	DMX values
1	Pan	127	
2	Pan Fine	127	Fine byte of Pan
3	Tilt	128	
4	Tilt Fine	0	Fine byte of Tilt
5	Position MSpeed	0	
6	Zoom	128	0–63 ZOOM NARROW 64–126 ZOOM MEDIUM NARROW 127–190 ZOOM MEDIUM LARGE 191–255 ZOOM LARGE
7	Effects1Pos Rotate	0	0–127 0/60 GEGREES 128–188 ROT MIR FST/SLW CW 189–193 STOP MIR ROT 194–255 ROT MIR SLW/FST CCW
8	Dimmer	0	0–24 Zero 25–51 10% 52–76 20% 77–101 30% 102–126 40% 127–152 50% 153–177 60% 178–202 70% 203–229 80% 230–254 90% 255–255 100%
9	Shutter / Strobe	0	0–3 STROBE CLOSED 4–103 STROBE 1 SLW/FST 104–107 STROBE OPEN 108–207 STROBE 2 SLW/FST 208–212 STROBE OPEN 213–225 RANDOM SLW 226–238 RANDOM MED 239–251 RANDOM FST 252–255 STROBE OPEN
10	Red	0	
11	Green	0	
12	Blue	0	
13	White	0	
14	Color Add WW	0	
15	Effects2Pos Rotate	0	
16	Color Effects1	0	
17	Effect	0	
18	Color Macro1Rate	0	
19	Red	255	
20	Green	255	
21	Blue	255	
22	White	255	
23	Fixture Global Reset	0	0–25 NULL 26–77 RESET EFFECT 78–127 RESET PAN TILT 128–255 RESET TOT
24	Dimmer	0	
25	Shutter / Strobe 3	0	
26	Red	255	

30ch (continued)

Ch	Function	Default	DMX values
27	Green	255	
28	Blue	255	
29	Color Effects1	0	
30	Effect Speed	0	