
UPSTAGE ↑

FIXTURE LEGEND

- **LEDForce 18 RGBW** — Blinder · 8×
- **Robin Spikie** — Moving Head · 8×

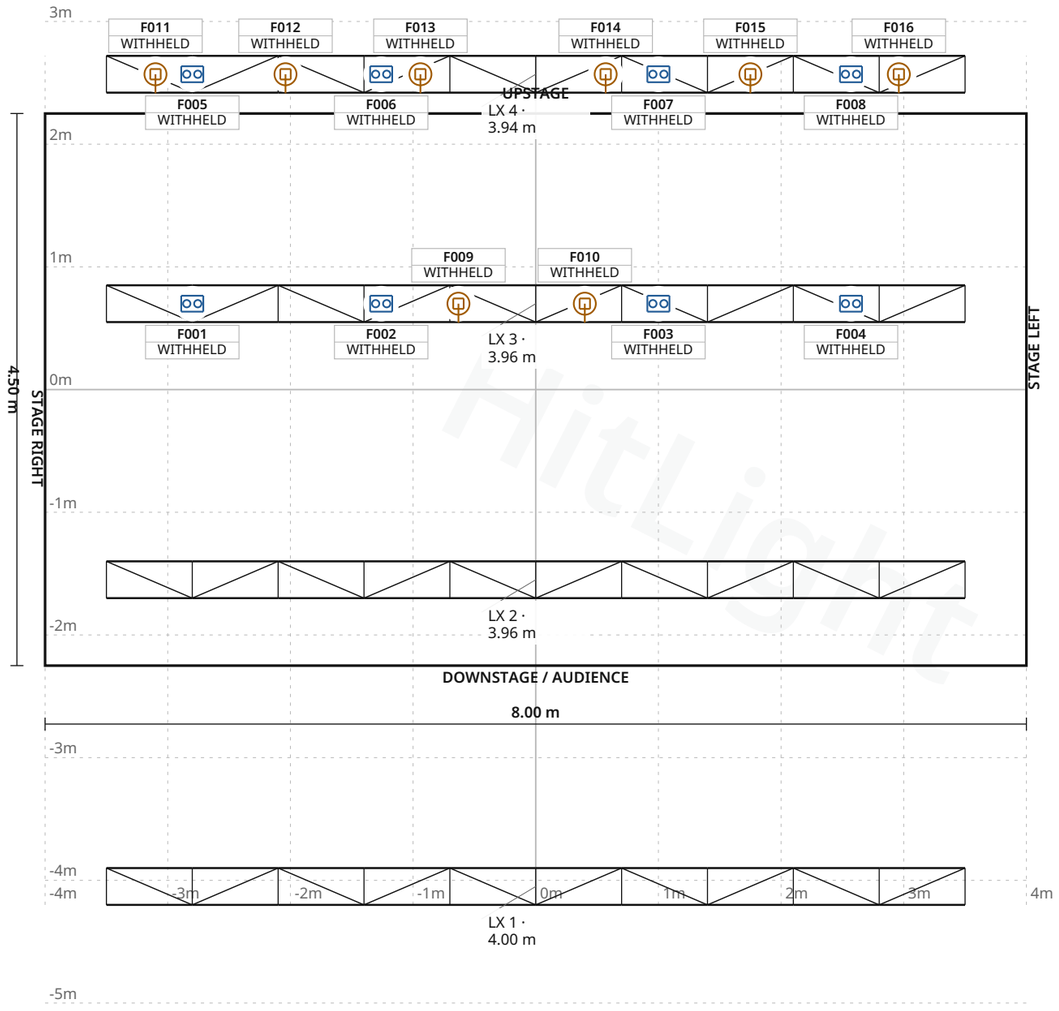

Stage 8.00 m W × 4.50 m D · Grid 1 m

Tøjhuset · Main Stage

LIGHT PLOT · PLAN · Main Stage

HitLight · Tøjhuset

Gothersgade 34, 7000, Fredericia, Denmark

DWG HL · SCALE 1:50 · metric · PRINT AT 100%

Drawn HitLight

Generated from the saved show

SOURCE 1ea74c6ea77d

SYMBOL LEGEND

2 TYPES · 16 FIXTURES · COLOUR BY TYPE



Robe Lighting LEDForce 18 RGBW

Blinder · Mode 2 RGBW + dim + strobe · 6 ch · category symbol

8 physical · 8 plotted

0 disabled · 0 unplaced



Robe Lighting Robin Spikie

Moving Head · Mode 1 Standard 16-bit · 27 ch · category symbol

8 physical · 8 plotted

0 disabled · 0 unplaced

HitLight

Tøjhuset · Main Stage

SYMBOL LEGEND · Main Stage

HitLight · Tøjhuset

Gothersgade 34, 7000, Fredericia, Denmark

DWG HL · METRIC

Drawn HitLight

Generated from the saved show

SOURCE 1ea74c6ea77d

GENERAL NOTES

1. Source-based lighting plan. Confirm the current rig with the venue.
2. PARTIAL: included fixtures are not a full physical-unit census.
3. DMX PATCH WITHHELD: provisional or unchecked addresses are not published.
4. The reconstruction retains its documented coverage and geometry assumptions; confirm the current setup with the venue.

HitLight

STAGE ELEMENTS

NAME	TYPE	POSITION	TRIM / SIZE
LX 2	trussStraight	X 0.00 m · Z 1.55 m	3.96 m · 7.00 m W × 0.30 m D
LX 4	trussStraight	X 0.00 m · Z -2.57 m	3.94 m · 7.00 m W × 0.30 m D
LX 3	trussStraight	X 0.00 m · Z -0.70 m	3.96 m · 7.00 m W × 0.30 m D
LX 1	trussStraight	X 0.00 m · Z 4.05 m	4.00 m · 7.00 m W × 0.30 m D

HitLight

DMX PATCH

16 FIXTURES · 0 UNIVERSES

Fixture / name	Manufacturer / model	Mode	Ch	DMX	Range	Position / mount	Status / notes
UNPATCHED / INVALID							
F001 · Robe LedForce 18 RGBW - 1	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 3	Enabled
F002 · Robe LedForce 18 RGBW - 2	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 3	Enabled
F003 · Robe LedForce 18 RGBW - 3	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 3	Enabled
F004 · Robe LedForce 18 RGBW - 4	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 3	Enabled
F005 · Robe LedForce 18 RGBW - 5	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 4	Enabled
F006 · Robe LedForce 18 RGBW - 6	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 4	Enabled
F007 · Robe LedForce 18 RGBW - 7	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 4	Enabled
F008 · Robe LedForce 18 RGBW - 8	Robe Lighting / LEDForce 18 RGBW	Mode 2 RGBW + dim + st...	6	WITHHELD	TBC	LX 4	Enabled
F009 · Robin Spikie - 1	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 3	Enabled
F010 · Robin Spikie - 2	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 3	Enabled
F011 · Robin Spikie - 3	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 4	Enabled
F012 · Robin Spikie - 4	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 4	Enabled
F013 · Robin Spikie - 5	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 4	Enabled
F014 · Robin Spikie - 6	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 4	Enabled
F015 · Robin Spikie - 7	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 4	Enabled
F016 · Robin Spikie - 8	Robe Lighting / Robin Spikie	Mode 1 Standard 16-bit	27	WITHHELD	TBC	LX 4	Enabled

No patched universes

VALIDATION APPENDIX

WARNING · PATCH_WITHHELD

DMX patch facts are withheld pending source verification. This planning document cannot be used for hardware output.

Objects: — · Remediation: correct the saved show data and regenerate.

WARNING · TITLE_METADATA_INCOMPLETE

Some professional title-block metadata is missing; the document will show an em dash.

Objects: ed00af8d2683d80b6d3b5427 · Remediation: correct the saved show data and regenerate.

HitLight

VENUE & DRAWING SOURCES

Tøjhuset

Main Stage · Published house specification; current setup unconfirmed

Gothersgade 34, 7000, Fredericia, DK

https://www.tojhuset.dk/

Sources checked 2026-10-23

Symbols: HitLight-owned category artwork. No manufacturer model geometry or original source pages included.

Source-based reconstruction. Confirm the current installation and equipment availability with the venue.

Scale, fixture positions, mounting heights and aiming may include estimates; this is not a rigging specification.

Provisional fixture matches are labelled as placeholders. The recorded subset is not a complete physical inventory.

DMX addresses are withheld from public plans until their exact source patch is reconciled.

The reconstruction retains its documented coverage and geometry assumptions; confirm the current setup with the venue.

Official venue information: https://www.tojhuset.dk/ · checked 2026-10-19

Physical venue location: https://www.tojhuset.dk/kontakt/kontakt-og-aabningstider/ · checked 2026-10-23

toejhuset-light-specs-main-stage.pdf: https://www.tojhuset.dk/media/531211/toejhuset-light-specs-main-stage.pdf · checked 2026-10-19

Venue technical reference: https://dansklive.dk/om-os/medlemmer/ · checked 2026-10-19

Public venue page: https://www.hitlight.app/venues/denmark/tøjhuset-ed00af8d

HitLight