
ACME

ACME THEATRE LED FLOOD CW (CYC-200 CW)

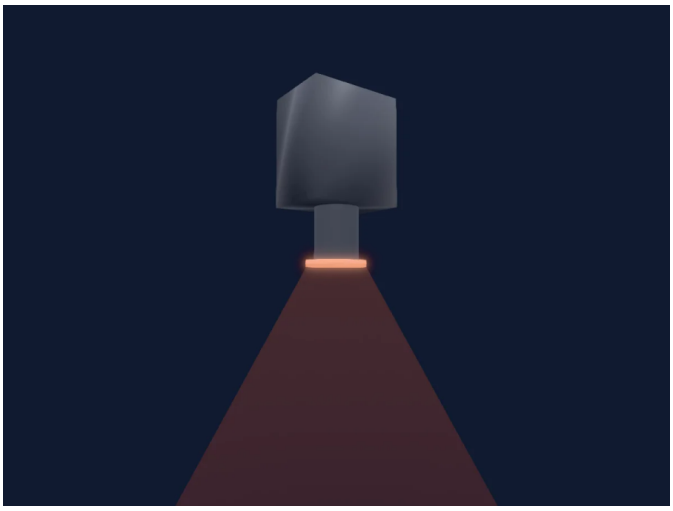

Manufacturer	**ACME**
Type	**PAR**
DMX modes	**2**
DMX footprint	**2, 3 channels**
Beam angle	**60°**
Size (W × H × D)	**210 × 314 × 274 mm**
GDTF fixture type	**D28310A0-40F5-4A76-9BEC-F4…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

Mode 1 2CH	2 ch
Mode 2 3CH	3 ch

Mode 1 2CH

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

Mode 2 3CH

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	15	0–7 Closed 8–15 Open 16–130 min Strobe 131–131 max Strobe 132–139 Open 2 140–180 min Pulse Open 181–181 max Pulse Open 182–189 Open 3 190–230 min Pulse Close 231–231 max Pulse Close 232–239 Open 4 240–246 min Strobe Ran 247–247 max Strobe Ran 248–255 Open 5