
Aputure

LS 600C Pro

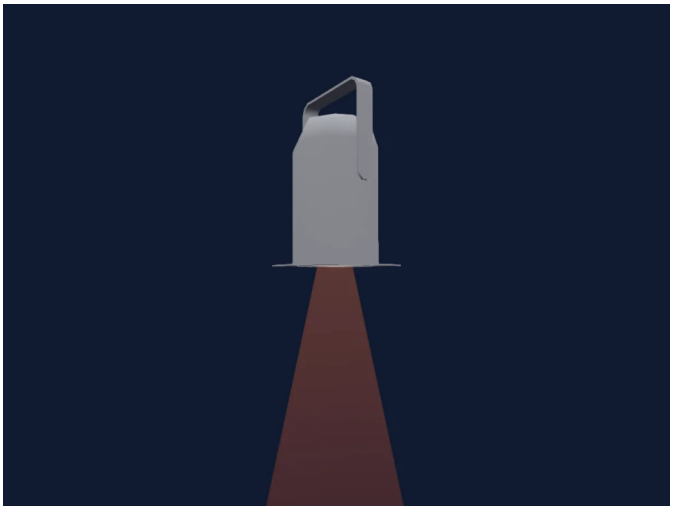

Manufacturer	**Aputure**
Type	**PAR**
DMX modes	**1**
DMX footprint	**15 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**56631240-7C32-4021-A6D1-4E…**

Controls

RGB colour mixing · Colour temperature · Colour wheel · Dimmer

DMX modes

Mode 12 — 15 ch

Mode 12

15 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	C TC	0	
4	C TC Fine	0	Fine byte of C TC
5	Tint	0	0–16 Neutral / No Effect 17–37 Full Minus Green 38–116 - 99% - - 1% 117–155 Neutral / No Effect 156–234 1% - 99% 235–255 Full Plus Green
6	Tint Fine	0	Fine byte of Tint
7	Color XF	0	0–254 CTC 255–255 RGB
8	Color XF Fine	0	Fine byte of Color XF
9	Color RGBRed	0	
10	Color RGBRed Fine	0	Fine byte of Color RGBRed
11	Color RGBGreen	0	
12	Color RGBGreen Fine	0	Fine byte of Color RGBGreen
13	Color RGBBlue	0	
14	Color RGBBlue Fine	0	Fine byte of Color RGBBlue
15	Strobe Frequency	0	0–19 No Effect 20–255 1 Hz - 25 Hz