
Aputure

MC Pro

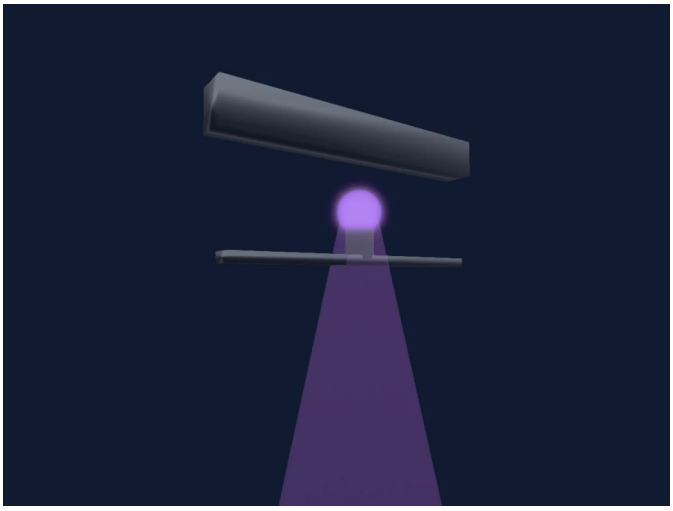

Manufacturer	**Aputure**
Type	**PAR**
DMX modes	**2**
DMX footprint	**8, 15 channels**
Size (W × H × D)	**300 × 40 × 35 mm**
GDTF fixture type	**7F929168-9CE9-437A-99FD-54…**

Controls

RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

MODE 1 : CCT + RGB	8 ch
Mode 13	15 ch

MODE 1 : CCT + RGB

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	C TC	115	
3	Tint	128	0–10 Neutral 11–20 Full -G 21–119 99% to 1% -G 120–145 Neutral 146–244 99% to 1% +G 245–255 Full +G
4	Color XF	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	Shutter / Strobe	0	0–19 Open 20–255 1 to 25 flash/s

Mode 13

15 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	C TC	38	
4	C TC Fine	102	Fine byte of C TC
5	Tint	156	38–116 -100 to -1 117–155 0 156–255 1 to 100
6	Tint Fine	41	Fine byte of Tint
7	Color XF	0	
8	Color XF Fine	0	Fine byte of Color XF
9	Red	255	
10	Red Fine	255	Fine byte of Red
11	Green	255	
12	Green Fine	255	Fine byte of Green
13	Blue	255	
14	Blue Fine	255	Fine byte of Blue
15	Shutter / Strobe	0	0–19 Open 20–255 1 to 25 flash/s