
ATON

Deco Bar

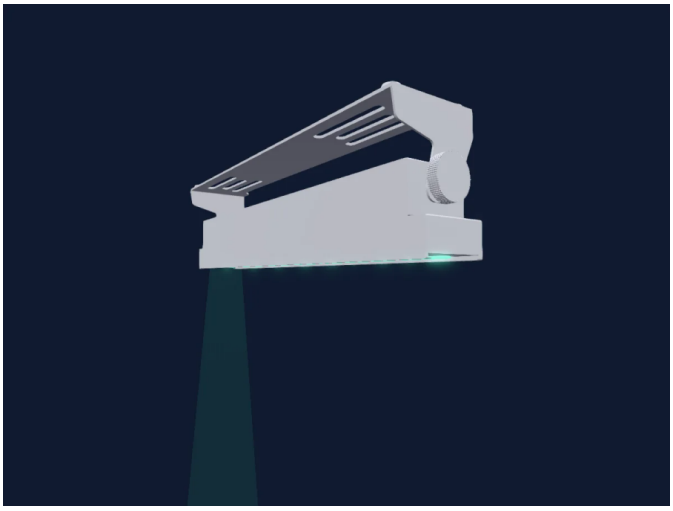

Manufacturer	**ATON**
Type	**Effect light**
DMX modes	**5**
DMX footprint	**2, 3, 4, 7, 10 channels**
Beam angle	**10°**
Size (W × H × D)	**498 × 88 × 92 mm**
GDTF fixture type	**D53FDE72-A758-4236-8B6B-A1…**

Controls

RGB colour mixing · Colour temperature · Colour wheel · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

2 Channel	2 ch
3 Channel	3 ch
4 Channel	4 ch
7 Channel	7 ch
10 Channel	10 ch

2 Channel

2 channels

Ch	Function	Default	DMX values
1	Color Macro1	0	
2	C TO	0	0–0 Open 1–254 2500K 255–255 10000K

3 Channel

3 channels

Ch	Function	Default	DMX values
1	H SBHue	128	
2	H SBSaturation	128	
3	Dimmer	0	0–254 Closed 255–255 Open

4 Channel

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	

7 Channel

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	250	0–9 NoFeature 1 10–88 Slow Strobe 89–188 Med Strobe 189–189 Fast Strobe 190–199 Open 1 200–223 Random Slow 224–248 Random Med 249–249 Random Fast 250–255 Open 2
3	Red	255	
4	Green	255	
5	Blue	255	
6	Effect	0	0–7 Open 8–23 Auto 1 24–39 Auto 2 40–55 Auto 3 56–71 Auto 4 72–87 Auto 5 88–103 Auto 6 104–119 Auto 7 120–135 Auto 8 136–151 Auto 9 152–167 Auto 10 168–183 Auto 11 184–199 Auto 12 200–255 Auto 13

7 Channel (continued)

Ch	Function	Default	DMX values
7	Effect Speed	128	0–127 Slow 128–254 Med 255–255 Fast

10 Channel

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	250	0–9 NoFeature 1 10–88 Slow Strobe 89–188 Med Strobe 189–189 Fast Strobe 190–199 Open 1 200–223 Random Slow 224–248 Random Med 249–249 Random Fast 250–255 Open 2
3	Red	255	
4	Green	255	
5	Blue	255	
6	Color Macro1	0	
7	C TO	0	0–0 Open 1–254 2500K 255–255 10000K
8	Effect	0	0–7 Open 8–23 Auto 1 24–39 Auto 2 40–55 Auto 3 56–71 Auto 4 72–87 Auto 5 88–103 Auto 6 104–119 Auto 7 120–135 Auto 8 136–151 Auto 9 152–167 Auto 10 168–183 Auto 11 184–199 Auto 12 200–255 Auto 13
9	Effect Speed	128	0–127 Slow 128–254 Med 255–255 Fast
10	Control1	0	