
Briteq

BT-THEATRE 150EZ

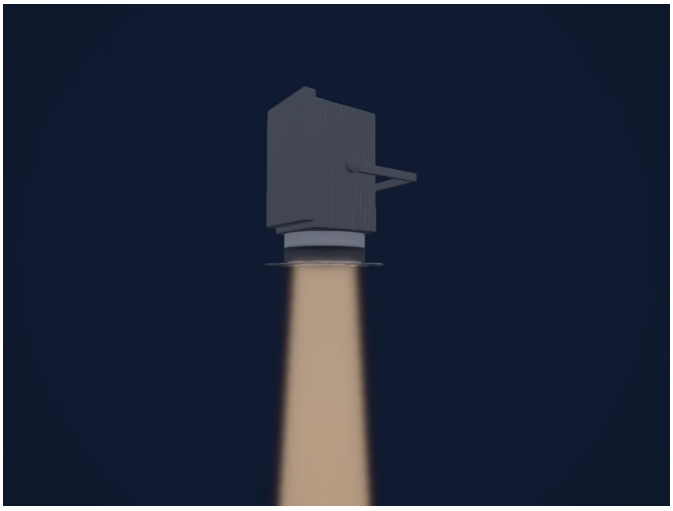

Manufacturer	**Briteq**
Type	**PAR**
DMX modes	**6**
DMX footprint	**1, 2, 3, 4 channels**
Beam angle	**10°**
Size (W × H × D)	**329 × 436 × 399 mm**
GDTF fixture type	**2060D5D2-DB3B-5B49-B835-5…**

Controls

Zoom · Strobe · Dimmer

DMX modes

1CH DIM 8bit	1 ch
2CH D+S 8bit	2 ch
2CH DIM 16bit	2 ch
3CH D+S 16bit	3 ch
3CH D+S+F 8bit	3 ch
4CH D+S+F 16bit	4 ch

1CH DIM 8bit

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

2CH D+S 8bit

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–5 Open (no strobe) 6–125 Normal strobe slow to fast 126–135 Open (no strobe) 136–255 Random strobe slow to fast

2CH DIM 16bit

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer

3CH D+S 16bit

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–5 Open (no strobe) 6–125 Normal strobe slow to fast 126–135 Open (no strobe) 136–255 Random strobe slow to fast

3CH D+S+F 8bit

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–5 Open (no strobe) 6–125 Normal strobe slow to fast 126–135 Open (no strobe) 136–255 Random strobe slow to fast
3	Zoom	0	

4CH D+S+F 16bit

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–5 Open (no strobe) 6–125 Normal strobe slow to fast 126–135 Open (no strobe) 136–255 Random strobe slow to fast
4	Zoom	0	

Fixture model: gdtf-briteq-bt-theatre-150ez-2000006020
Creator: HitLight
Modifications: Original HitLight 3D housing: scripted parametric geometry modelled by HitLight from public product photos and the manufactu...