
Cameo

CLDS100

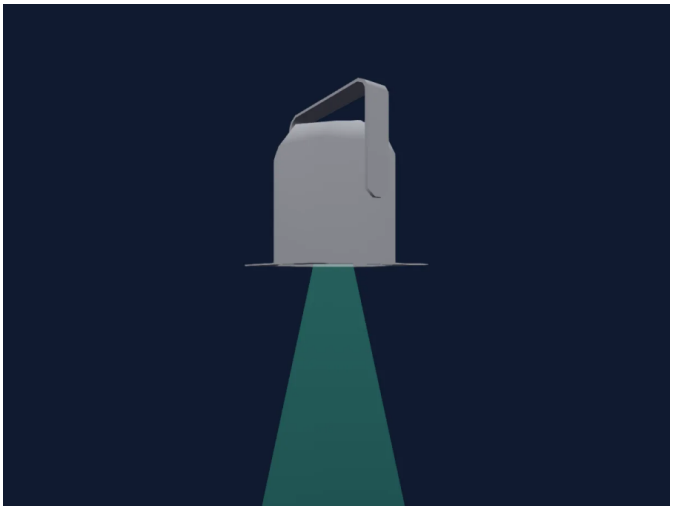

Manufacturer	**Cameo**
Type	**PAR**
DMX modes	**1**
DMX footprint	**6 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**DD8FC7B2-AC5D-4F1D-8EA3-6…**

Controls

Extra LED colours · RGB colour mixing · Dimmer

Safety-relevant functions

Service functions

DMX modes

6 Channel Mode — 6 ch

6 Channel Mode

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Control1	0	0–24 No Function 1 25–26 Record Color 1 27–28 Record Color 2 29–30 Record Color 3 31–32 Record Color 4 33–73 No Function 2 74–75 Dimmer Response LED 76–77 Dimmer Response Halogen 78–119 No Function 3 120–121 650 Hz 122–123 1530 Hz 124–125 3600 Hz 126–127 12000 Hz 128–129 18900 Hz 130–131 25000 Hz 132–133 RAW 134–135 Factory Calibration 136–137 User Calibration 138–163 No Function 4 164–165 Linear 166–167 Exponential 168–169 Logarithmic 170–171 S-Curve 172–239 No Function 5 240–241 Load Factory Defaults 242–255 No Function 6