
Chauvet Professional

Ovation ED-200WW

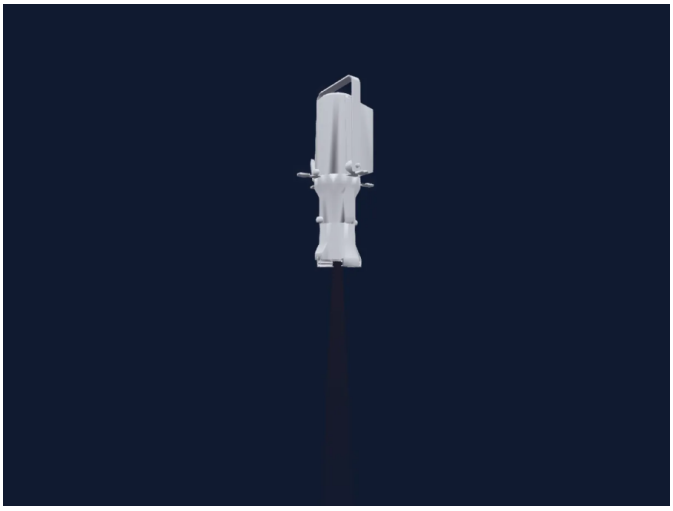

Manufacturer	**Chauvet Professional**
Type	**Profile spot**
DMX modes	**3**
DMX footprint	**1, 2, 3 channels**
Beam angle	**6.4°**
Size (W × H × D)	**333 × 390 × 38 mm**
GDTF fixture type	**B0F4E4C9-2F54-4BE9-84B0-806…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

UNO	1 ch
DOS	2 ch
STD P	3 ch

UNO

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max

DOS

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer

STD P

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–9 Open - Shutter Open 10–99 Strobe S > F - Strobe 100–109 Open - Shutter Open 110–179 Lightning Effect - Strobe 180–189 Open - Shutter Open 190–255 Strobe Random - Strobe Random