
Chauvet Professional

# Ovation F-265WW Rev2

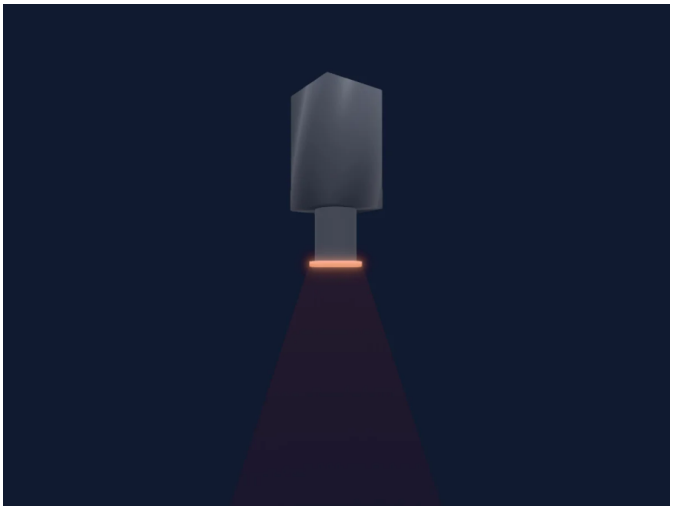

| | |
|---|---|
| Manufacturer | **Chauvet Professional** |
| Type | **Spot** |
| DMX modes | **2** |
| DMX footprint | **2, 5 channels** |
| Beam angle | **16-65°** |
| Size (W × H × D) | **250 × 450 × 250 mm** |
| GDTF fixture type | **17F6F8FE-99A6-48C5-B753-70…** |

## Controls

Zoom · Strobe · Dimmer

## Safety-relevant functions

Fixture reset · Strobe

## DMX modes

| | |
|---|---|
| 2 CH: 8bit Dim+Zoom | 2 ch |
| 5 Channel 16-Bit | 5 ch |

## 2 CH: 8bit Dim+Zoom

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |
| 2 | Zoom | 128 | |

## 5 Channel 16-Bit

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Dimmer Fine | 0 | Fine byte of Dimmer |
| 3 | Zoom | 0 | |
| 4 | Shutter / Strobe | 0 | 0–9 Open 1<br>10–99 Strobe- Slow to Fast<br>100–109 Open 2<br>110–179 Lightning- Slow to Fast<br>180–189 Open 3<br>190–255 Random- Slow to Fast |
| 5 | Zoom Reset | 0 | 0–200 No Function 1<br>201–220 ZoomReset<br>221–255 No Function 2 |