
CKC Lighting

Gobo Projector 100

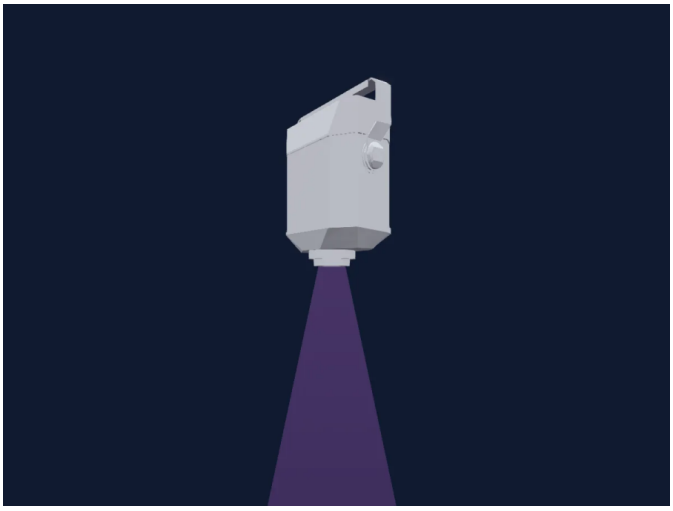

Manufacturer	**CKC Lighting**
Type	**PAR**
DMX modes	**1**
DMX footprint	**6 channels**
Beam angle	**25°**
Size (W × H × D)	**286 × 175 × 54 mm**
GDTF fixture type	**C8F5819B-6C05-4058-8381-A3…**

Controls

Colour wheel · Strobe · Dimmer · Gobos · Gobo rotation

Safety-relevant functions

Strobe

DMX modes

6CH — 6 ch

6CH

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 0% 255–255 100%
2	Shutter / Strobe	50	0–31 closed 32–63 open1 64–94 min strobe 95–95 max strobe 96–127 open2 128–158 min pulse 159–159 max pulse 160–191 open3 192–222 min random 223–223 max random 224–255 open4
3	Color Wheel	0	0–5 open (wheel slot 1) 6–115 indexing 116–120 Color off (wheel slot 1) 121–130 Red (wheel slot 2) 131–140 Orange (wheel slot 3) 141–150 Yellow (wheel slot 4) 151–160 Green (wheel slot 5) 161–170 Cyan (wheel slot 6) 171–180 Lavendel (wheel slot 7) 181–190 Magenta (wheel slot 8) 191–192 White (wheel slot 1) 193–222 Fast CW 223–223 Slow CW 224–224 Stop 225–254 Slow CCW 255–255 Fast CCW
4	Gobo	0	0–5 open (wheel slot 1) 6–20 Gobo1 (wheel slot 2) 21–35 Gobo2 (wheel slot 3) 36–50 Gobo3 (wheel slot 4) 51–65 Gobo4 (wheel slot 5) 66–80 Gobo5 (wheel slot 6) 81–95 Gobo6 (wheel slot 7) 96–110 Gobo1 Shake 111–125 Gobo2 Shake 126–140 Gobo3 Shake 141–155 Gobo4 Shake 156–170 Gobo5 Shake 171–185 Gobo6 Shake 186–192 open 193–222 Fast CW 223–223 Slow CW 224–224 Stop 225–254 Slow CCW 255–255 Fast CCW
5	Gobo Rotation	0	0–5 Rot Off 6–128 Position 0-540 129–190 Fast CW 191–191 Slow CW 192–192 Stop 193–254 Slow CCW 255–255 Fast CCW
6	Gobo Rotation Fine	0	Fine byte of Gobo Rotation