
CKC Lighting

Par Z19 IP

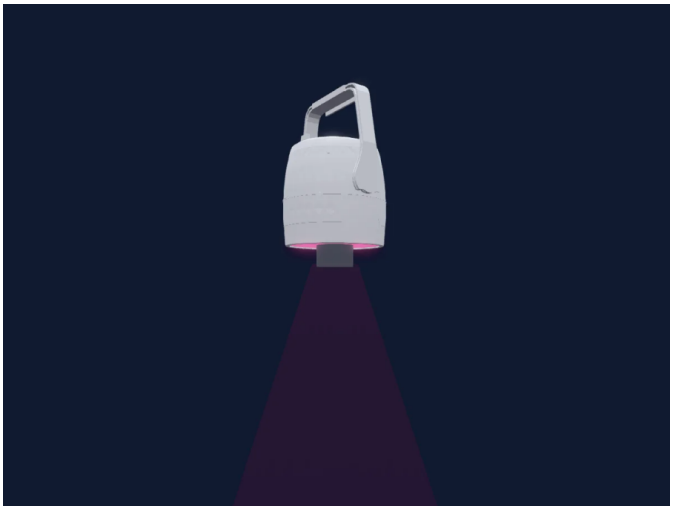

Manufacturer	**CKC Lighting**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**7, 9, 10, 14 channels**
Beam angle	**23-53°**
Size (W × H × D)	**295 × 286 × 90 mm**
GDTF fixture type	**0AF5A770-CD11-4517-BA2F-18…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

7CH	7 ch
9CH	9 ch
10CH	10 ch
14CH	14 ch

7CH

7 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add CW	255	
5	Color Add RY	255	
6	UV	0	
7	Zoom	128	0–127 0% 128–254 50% 255–255 100%

9CH

9 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add CW	255	
5	Color Add RY	255	
6	UV	0	
7	Zoom	128	0–127 0% 128–254 50% 255–255 100%
8	Dimmer	0	
9	Dimmer Fine	0	Fine byte of Dimmer

10CH

10 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add CW	255	
5	Color Add RY	255	
6	UV	0	
7	Zoom	128	0–127 0% 128–254 50% 255–255 100%
8	Dimmer	0	
9	Dimmer Fine	0	Fine byte of Dimmer
10	Shutter / Strobe	50	0–31 closed 32–63 open 64–94 min Strobe 95–95 max Strobe 96–127 shutter open(2) 128–158 min pulse 159–159 max pulse 160–191 shutter open(3) 192–222 min Random 223–223 max Random 224–255 shutter open(4)

14CH

14 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add CW	255	
5	Color Add RY	255	
6	UV	0	
7	Zoom	128	0–127 0% 128–254 50% 255–255 100%
8	Dimmer	0	
9	Dimmer Fine	0	Fine byte of Dimmer
10	Shutter / Strobe	50	0–31 closed 32–63 open 64–94 min Strobe 95–95 max Strobe 96–127 shutter open(2) 128–158 min pulse 159–159 max pulse 160–191 shutter open(3) 192–222 min Random 223–223 max Random 224–255 shutter open(4)
11	Color Macro1	0	
12	Effect	0	0–20 Off 21–40 CHANG6 41–60 CHANG30 61–80 FADE 81–255 No funtion
13	Effect Speed	0	0–254 slow 255–255 fast
14	Dimmer Mode	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default