
CKC Lighting

Profile 300(5600K)

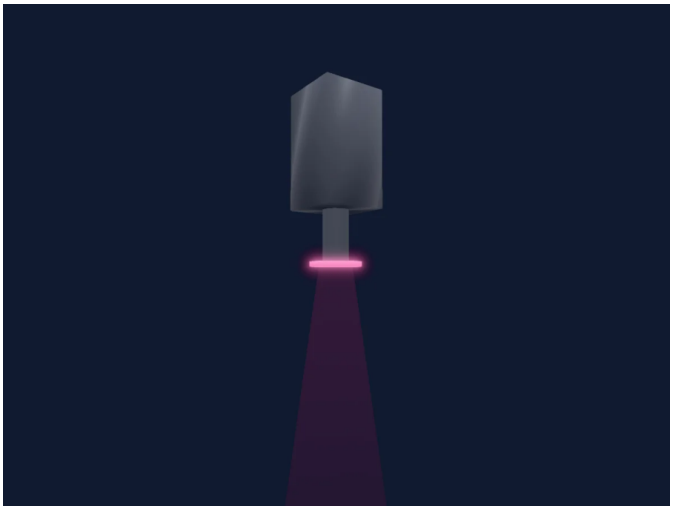

Manufacturer	**CKC Lighting**
Type	**Profile spot**
DMX modes	**3**
DMX footprint	**1, 3, 4 channels**
Beam angle	**19°**
Size (W × H × D)	**250 × 450 × 250 mm**
GDTF fixture type	**65FE5406-D40B-455A-B43E-E2…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

1CH	1 ch
3CH	3 ch
4CH	4 ch

1CH

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 0% 63–126 25% 127–190 50% 191–254 75% 255–255 100%

3CH

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 0% 63–126 25% 127–190 50% 191–254 75% 255–255 100%
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	50	0–31 Closed 32–63 Open 64–94 Strobe Min 95–95 Strobe Max 96–127 Open 128–158 Strobe Pulse Min 159–159 Strobe Pulse Max 160–191 Open 192–222 Random Strobe Min 223–223 Random Strobe Max 224–255 Open

4CH

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 0% 63–126 25% 127–190 50% 191–254 75% 255–255 100%
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	50	0–31 Closed 32–63 Open 64–94 Strobe Min 95–95 Strobe Max 96–127 Open 128–158 Strobe Pulse Min 159–159 Strobe Pulse Max 160–191 Open 192–222 Random Strobe Min 223–223 Random Strobe Max 224–255 Open
4	Dimmer Mode	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default to Unit Setting