
EK Lights

Blinder II

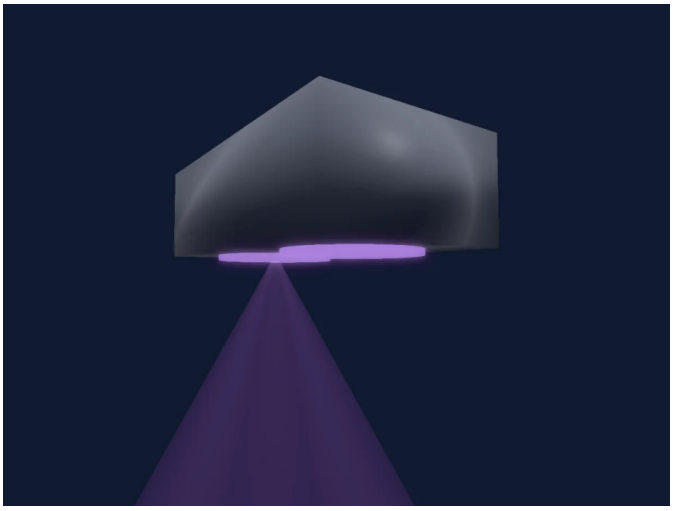

Manufacturer	**EK Lights**
Type	**Blinder**
DMX modes	**4**
DMX footprint	**1, 2, 4, 7 channels**
Beam angle	**60°**
Size (W × H × D)	**372 × 116 × 214 mm**
GDTF fixture type	**04867927-5406-4199-944F-7F6…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

1 Channel Mode	1 ch
2 Channel Mode	2 ch
4 Channel Mode	4 ch
7 Channel Mode	7 ch

1 Channel Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2 Channel Mode

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	0	0–254 Closed 255–255 Open

4 Channel Mode

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer	0	0–254 Closed 255–255 Open
4	Shutter / Strobe	0	0–10 Open 11–255 Strobe

7 Channel Mode

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer	0	0–254 Closed 255–255 Open
4	Shutter / Strobe	0	0–10 Open 11–255 Strobe
5	Effect	0	0–10 No Function 11–40 Program 1 41–80 Program 2 81–120 Program 3 121–170 Program 4 171–220 Program 5 221–255 Program 6
6	Effect Speed	0	
7	Dimmer Mode	0	0–51 Onboard Menu Selection 52–101 Linear Curve 102–152 Dimmer Curve 1 153–203 Dimmer Curve 2 204–255 Dimmer Curve 3