
LumiPro

LumiPro Zoom Par Pro IP - RGBW

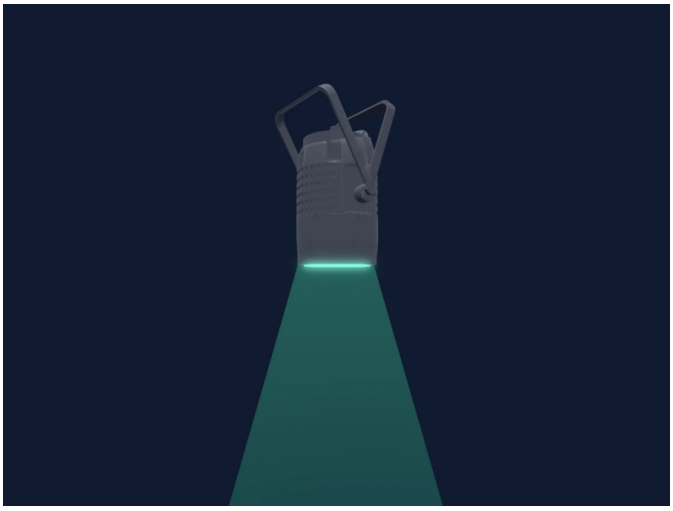

Manufacturer	**LumiPro**
Type	**PAR**
DMX modes	**3**
DMX footprint	**6, 7, 9 channels**
Beam angle	**11-59°**
Size (W × H × D)	**218 × 389 × 257 mm**
GDTF fixture type	**AA72D5EB-0477-4A05-BBC9-7…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

Mode 1 6CH	6 ch
Mode 2 7CH	7 ch
Mode 3 9CH	9 ch

Mode 1 6CH

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Zoom	128	0–127 Narrow 128–254 Mid 255–255 Wide

Mode 2 7CH

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Zoom	128	0–127 Narrow 128–254 Mid 255–255 Wide
7	Shutter / Strobe	0	0–12 Off 13–255 0-20Hz

Mode 3 9CH

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Zoom	128	0–127 Narrow 128–254 Mid 255–255 Wide
7	Shutter / Strobe	0	0–6 Off 7–255 0-20Hz
8	Color Macro1	0	0–3 Off 4–39 Colours fade in slowly and fade out quickly 40–75 Colours fade in slowly and fade out slowly 76–111 Colours fade in quickly and fade out slowly 112–147 Gradient colour change 148–183 Jump colour change 184–219 Pulse-variable colour 220–255 Voice-control activation (voice-controlled macro)
9	Color Macro1Rate	0	