
Martin Professional

Exterior Linear Pro Cove QUAD 1ft

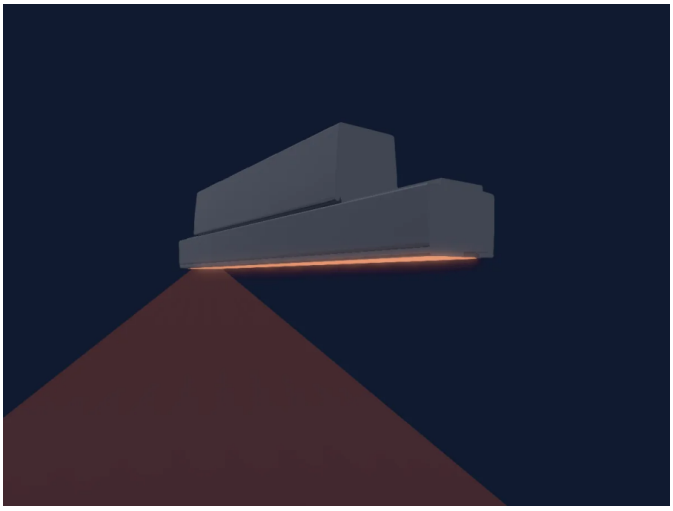

Manufacturer	**Martin Professional**
Type	**PAR**
DMX modes	**4**
DMX footprint	**3, 4, 6 channels**
Beam angle	**100°**
Heads / cells	**2**
Size (W × H × D)	**312 × 68 × 40 mm**
GDTF fixture type	**F00F13F3-1D80-493C-82DA-4A…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Dimmer · Pixel control

DMX modes

1 Segment	3 ch
Raw	4 ch
2 Segment	6 ch
Standard	6 ch

1 Segment

3 channels

Ch	Function	Default	DMX values
1	Red	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
2	Green	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
3	Blue	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max

Raw

4 channels

Ch	Function	Default	DMX values
1	Red	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
2	Green	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
3	Blue	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
4	White	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max

2 Segment

6 channels

Ch	Function	Default	DMX values
1	Red	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
2	Green	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max

2 Segment (continued)

Ch	Function	Default	DMX values
3	Blue	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
4	Red	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
5	Green	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
6	Blue	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max

Standard

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–63 Closed 64–127 25% 128–191 50% 192–254 75% 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Red	255	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
4	Green	255	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
5	Blue	255	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
6	C TC	78	