
Martin Professional

Exterior Linear Pro Graze CTC 1ft

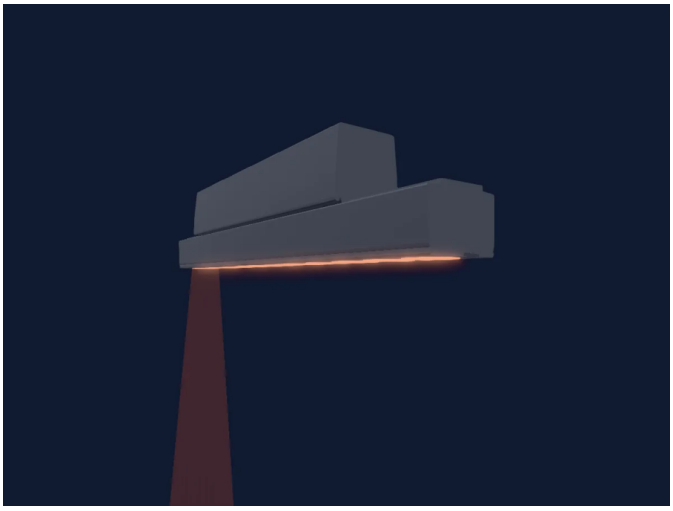

Manufacturer	**Martin Professional**
Type	**PAR**
DMX modes	**3**
DMX footprint	**3, 6 channels**
Beam angle	**9°**
Size (W × H × D)	**312 × 68 × 40 mm**
GDTF fixture type	**D7938CCA-E86F-4B71-924B-6A…**

Controls

Extra LED colours · Colour temperature · Dimmer

DMX modes

1 Segment	3 ch
Standard	3 ch
2 Segment	6 ch

1 Segment

3 channels

Ch	Function	Default	DMX values
1	Color Add WW	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
2	White	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
3	Color Add CW	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max

Standard

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–63 Closed 64–127 25% 128–191 50% 192–254 75% 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	C TC	78	

2 Segment

6 channels

Ch	Function	Default	DMX values
1	Color Add WW	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
2	White	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
3	Color Add CW	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
4	Color Add WW	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
5	White	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max

2 Segment (continued)

Ch	Function	Default	DMX values
6	Color Add CW	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max