
OXO Light

SunFlood 300

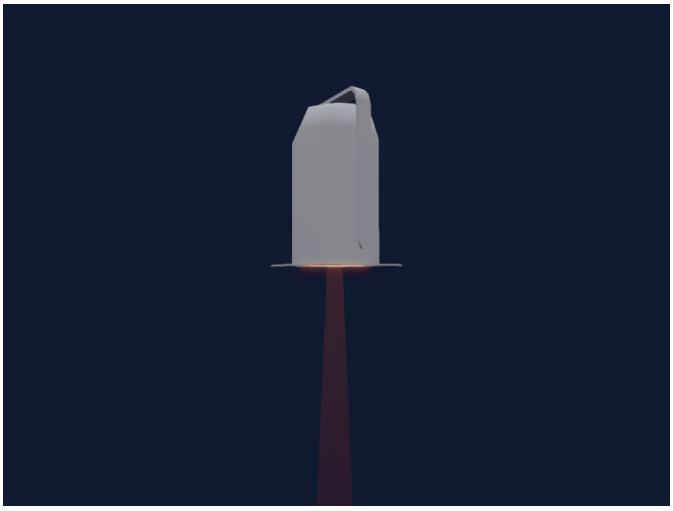

Manufacturer	**OXO Light**
Type	**PAR**
DMX modes	**2**
DMX footprint	**2, 4 channels**
Beam angle	**6°**
Size (W × H × D)	**266 × 430 × 45 mm**
GDTF fixture type	**09487BCA-4036-4E6B-ADDF-2C…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

2Chs Mode	2 ch
4Chs Mode	4 ch

2Chs Mode

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Dimmer ON 11–229 Strobe Slow 230–230 Strobe Fast 231–255 Dimmer ON Full

4Chs Mode

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–10 Dimmer ON 11–229 Strobe Slow 230–230 Strobe Fast 231–255 Dimmer ON Full
4	Control1	0	0–50 No Fonction 51–55 No DMX - Hold After 5s 56–100 No Fonction 101–105 No DMX - Blackout After 5s 106–150 No Fonction 151–155 No DMX - Snapshot After 5s 156–200 No Fonction 201–230 Record Snapshot After 5s 231–255 No Fonction