
Pluslite

SAGOMA PL100PZC Colors RGBL

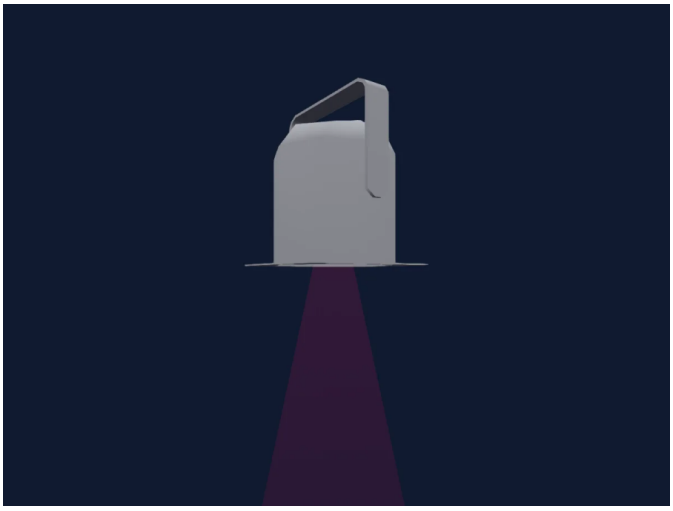

Manufacturer	**Pluslite**
Type	**Profile spot**
DMX modes	**4**
DMX footprint	**1, 4, 6, 10 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**3490237E-4FB5-4101-942D-FF7…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

Safety-relevant functions

Strobe

DMX modes

1 ch mode	1 ch
4 ch Mode	4 ch
6 ch Mode	6 ch
10 ch Mode	10 ch

1 ch mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

4 ch Mode

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add RY	255	

6 ch Mode

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	
3	Red	255	
4	Green	255	
5	Blue	255	
6	Color Add RY	255	

10 ch Mode

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	
3	Red	255	
4	Green	255	
5	Blue	255	
6	Color Add RY	255	
7	Color Macro1	0	0–4 no function 5–36 2800 k 37–68 3086 k 69–100 3200 k 101–132 4200 K 133–164 5600 K 165–196 6500 K 197–238 7600 K 239–255 8000 K
8	Color Effects1	0	
9	Color Macro1Rate	0	0–4 no function 5–130 Color jump increasing 131–255 Color fading increasing

10 ch Mode (continued)

Ch	Function	Default	DMX values
10	Dimmer Mode	0	0–5 No function 6–47 Standard 48–89 Stage 90–131 TV 132–173 Architecture 174–215 Theatre 216–255 Custom