
PR-Lighting

XLED 1037

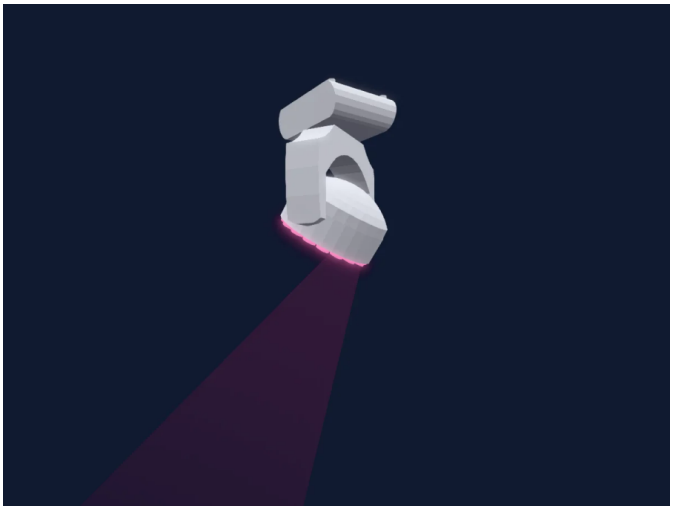

Manufacturer	**PR-Lighting**
Type	**Moving head**
DMX modes	**2**
DMX footprint	**15, 24 channels**
Beam angle	**12-54°**
Pan range	**540°**
Tilt range	**220°**
Heads / cells	**3**
Size (W × H × D)	**274 × 161 × 273 mm**
GDTF fixture type	**F66DB531-B627-4CE9-BE53-8F…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour wheel · Dimmer · Pixel control · Movement speed

Safety-relevant functions

Fixture reset

DMX modes

Standard	15 ch
Extended	24 ch

Standard

15 channels

Ch	Function	Default	DMX values
1	Reserved 1	0	
2	Dimmer	0	0–254 Closed 255–255 Open
3	Color Effects1	0	0–31 NO 32–63 Red 64–95 Green 96–127 Blue 128–159 Yellow 160–191 Cyan 192–223 Magenta 224–255 White
4	Red	255	
5	Green	255	
6	Blue	255	
7	White	255	
8	Zoom	127	
9	Zoom Fine	255	Fine byte of Zoom
10	Pan	128	
11	Pan Fine	0	Fine byte of Pan
12	Tilt	128	
13	Tilt Fine	0	Fine byte of Tilt
14	Scale XYZ	0	
15	Control1	0	

Extended

24 channels

Ch	Function	Default	DMX values
1	Strobe Mode Shutter	0	0–15 No Strobe 16–255 Strobe
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer Fine	0	Fine byte of Dimmer
4	Color Macro1	0	0–31 NO 32–63 Red 64–95 Green 96–127 Blue 128–159 Yellow 160–191 Cyan 192–223 Magenta 224–255 White
5	Red	255	
6	Red	255	
7	Red	255	
8	Green	255	
9	Green	255	
10	Green	255	
11	Blue	255	
12	Blue	255	
13	Blue	255	
14	White	255	

Extended (continued)

Ch	Function	Default	DMX values
15	White	255	
16	White	255	
17	Zoom	127	
18	Zoom Fine	255	Fine byte of Zoom
19	Pan	128	
20	Pan Fine	0	Fine byte of Pan
21	Tilt	128	
22	Tilt Fine	0	Fine byte of Tilt
23	Position MSpeed	0	
24	Control1	0	